



FLIR A500 Thermal Core

P/N: 90600-0000

Copyright

© 2023, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 90600-0000

Commit: 93988

Language:

Modified: 2023-11-01

Formatted: 2023-11-01

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General

When a camera is ordered the following must be selected, as a minimum:

- one of the camera bodies:
 - FLIR A400 Thermal Core
 - FLIR A500 Thermal Core
 - FLIR A700 Thermal Core
- one of the configurations:
 - Smart Sensor configuration
 - Image Streaming configuration
- one (or several) of the lenses:
 - IR lens, f=70 mm (6°) with case
 - IR lens, f=29 mm (14°)
 - IR lens, f=17 mm (24°)
 - IR lens, f=10 mm (42°)
 - IR lens, f=5 mm (80°) with case
 - IR lens Dual FOV, f=17/29 mm (24°/14°)

For orders of more than one lens, select the primary lens to be mounted on the Thermal Core camera body at delivery. The additional lenses are then delivered in separate boxes. The IR lens, f=70 (6°) and IR lens, f=5 mm (80°) are always delivered in a case.

Please note that other P/Ns are used when the lenses are ordered as accessories.

The following options are available:

- Antenna WLAN 2.4/5 GHz + Wi-Fi
- Option, Visual camera including MSX
- Advanced Smart Sensor configuration
- Advanced Image Streaming configuration
- Option, Macro mode 50/71/101 µm for 24°

Note the following:

The *Advanced Smart Sensor configuration* and the *Advanced Image Streaming configuration* require the *Smart Sensor configuration* and the *Image Streaming configuration*, respectively.

Imaging and optical data	
Infrared resolution	464 × 348 pixels
Thermal sensitivity (NETD)	<40 mK, 80° @ +30°C (86°F) <30 mK, 42° @ +30°C (+86°F) <40 mK, 24° @ +30°C (+86°F) <50 mK, 14° @ +30°C (+86°F) <50 mK, 6° @ +30°C (+86°F) <45 mK, Macro lens @ +30°C (+86°F)
Field of view (FOV)	Depending on lens used; see lens specification
Minimum focus distance	Depending on lens used; see lens specification
Focal length	Depending on lens used; see lens specification
Spatial resolution (IFOV)	Depending on lens used; see lens specification



FLIR A500 Thermal Core

P/N: 90600-0000

© 2023, FLIR Systems, Inc.

#90600-0000; r. 93988;

Imaging and optical data	
Lens identification	Automatic
f-number	Depending on lens used; see lens specification
Image frequency	30 Hz
Focus	- One-shot contrast - Motorized - Manual
Detector data	
Focal plane array/spectral range	Uncooled microbolometer/7.5–14 μm
Measurement	
Camera temperature range	–20 to 120°C (–4 to 248°F) 0 to 650°C (32 to 1202°F) 300 to 1500°C (572 to 2732°F)
Object temperature range and accuracy (for ambient temperature 15–35°C (59–95°F))	- Range –20 to 120°C (–4 to 248°F): –20 to 100°C (–4 to 212°F), accuracy $\pm 2^\circ\text{C}$ ($\pm 3.6^\circ\text{F}$) 100 to 120°C (212 to 248°F), accuracy $\pm 2\%$ - Range 0 to 650°C (32 to 1202°F): 0 to 100°C (32 to 212°F), accuracy $\pm 2^\circ\text{C}$ ($\pm 3.6^\circ\text{F}$) 100 to 650°C (212 to 1202°F), accuracy $\pm 2\%$ - Range 300 to 1500°C (572 to 2732°F): - accuracy $\pm 2\%$
Ethernet	
Interface	- Wired - Wi-Fi (option)
Connector type	- M12 8-pin X-coded, Female - RP-SMA, Female
Ethernet, purpose	Control, result, image, and power
Ethernet, type	1000 Mbps
Ethernet, standard	IEEE 802.3
Ethernet, communication	See Smart Sensor and Image Streaming configurations
Ethernet, power	Power over Ethernet, PoE IEEE 802.3af class 3
Ethernet, protocols	See Smart Sensor and Image Streaming configurations
Digital Input/output	
Connector type	M12 12-pin A-coded, Male (shared with external power)
Digital input	2x opto-isolated $V_{in(\text{low})} = 0\text{--}1.5\text{ V}$, $V_{in(\text{high})} = 3\text{--}25\text{ V}$
Digital input, purpose	See Smart Sensor and Image Streaming configurations
Digital output	3x opto-isolated, 0–30 V DC, max. 300 mA (derated to 200 mA at 60°C) - Solid state opto relay 1x dedicated as Fault output (NC)

P/N: 90600-0000

© 2023, FLIR Systems, Inc.

#90600-0000; r. 93988;

Digital Input/output	
Digital output, purpose	<i>See Smart Sensor and Image Streaming configurations</i>
Digital I/O, isolation voltage	500 VRMS
Power system	
Connector type	M12 12-pin A-coded, Male (shared with Digital I/O)
Power consumption	7.5 W at 24 V DC typical 7.8 W at 48 V DC typical 8.1 W at 48 V PoE typical
External power operation	24/48 V DC 8 W max
External voltage	Allowed range 18–56 V DC
Wi-Fi	
Connector type	RP-SMA, Female
Standard	<i>See Wi-Fi option</i>
Antenna	<i>See Wi-Fi option</i>
Connection type	<i>See Wi-Fi option</i>
Environmental data	
Operating temperature range	–20 to 50°C (–4 to 122°F) Cooling plate is needed in temperatures above 40°C (104°F). Maximum camera case temperature: 65°C (149°F)
Storage temperature range	IEC 68-2-1 and IEC 68-2-2, –40 to 70°C (–40 to 158°F) for 16 hours
Humidity (operating and storage)	IEC 60068-2-30/24 hours, 95% relative humidity, 25–40°C (77–104°F)/2 cycles
EMC	- ETSI EN 301 489-1 (radio) - ETSI EN 301 489-17 (radio) - EN 61000-4-8 (magnetic field) - FCC 47 CFR Part 15 Class B (emission US) - ISO 13766-1 (EMC - Earth-moving and building construction machinery) - EN ISO 14982 (EMC - Agricultural and forestry machinery)
Radio spectrum	- FCC 47 CFR Part 15 Class C (2.4 GHz band US) - FCC 47 CFR Part 15 Class E (5 GHz band US) - RSS-247 (2.4 GHz and 5 GHz band Canada) - ETSI EN 300 328 V2.1.1 (2.4 GHz band EU) - ETSI EN 301 893 V2.1.1 (5 GHz band EU) - GITEKI certification number: R201-140447
Encapsulation	IEC 60529, IP 54, IP66 with accessory
Shock	IEC 60068-2-27, 25 g
Vibration	- IEC 60068-2-6, 0.15 mm at 10–58 Hz and 2 g at 58–500 Hz, sinusoidal - IEC 61373 Cat 1 (Railway)
Safety	IEC 62368-1 (IT equipment audio-visual products)

P/N: 90600-0000

© 2023, FLIR Systems, Inc.

#90600-0000; r. 93988;

Environmental data	
Corrosion	- ISO 12944 C4 G or H - EN60068-2-11
Declaration of conformity	See: https://support.flir.com/resources/DoC
Physical data	
Weight (including 24° lens)	0.82 kg (1.8 lb)
Size (L x W x H)	123 x 77 x 77 mm (4.84 x 3.03 x 3.03 in)
Base mount	4x M4 on 4 sides
Tripod mounting	UNC 1/4"-20 on 2 sides
Housing material	Aluminium
Color	Black
Warranty and service	
Warranty	http://www.flir.com/warranty/
Shipping information	
Packaging, type	Cardboard box
Packaging, contents	- Infrared camera (without lens) - Ethernet cable M12 to RJ45F (0.3 m), P/N T911869ACC - Printed documentation including the username and password for log in to the web interface of the camera
Packaging, weight	1.14 kg (2.51 lb)
Packaging, size	207 x 142 x 129 mm (8.15 x 5.59 x 5.08 in)
EAN-13	7332558026793
UPC-12	845188022839
Country of origin	Sweden

Supplies & accessories:

- T300292; Advanced Image Streaming configuration
- T300293; Advanced Smart Sensor configuration
- T300239; IR lens, f=10 mm (42°)
- T300240; IR lens, f=17 mm (24°)
- T300241; IR lens, f=29 mm (14°)
- T300586; IR lens Dual FOV, f=17/29 mm (24°/14°)
- T300238; Macro lens 2.0x with case
- T300095; IR lens, f=70 mm (6°) with case
- T951004ACC; Ethernet cable CAT6, 2 m/6.6 ft.
- T130665ACC; Cooling plate
- T131367; FLIR Bridge
- T131369; FLIR Bridge Pro
- T300075ACC; IP hood for lens
- T300163; Hard case for FLIR A400/A500/A700 series
- T300202; Connector cap kit
- T300216; Axxx Accessory kit
- T300218; Two-ball mounting bracket kit
- T300268ACC; A-series connection board
- T911850; Antenna WLAN 2.4/5 GHz + Wi-Fi
- T911850ACC; Antenna for WLAN 2.4/5 GHz
- T911852ACC; Cable M12 to pigtail, 2 m
- T911853ACC; Cable M12 to pigtail, 10 m
- T911854ACC; Ethernet cable M12 to RJ45, 2 m
- T911855ACC; Ethernet cable M12 to RJ45, 10 m









FLIR A500 Thermal Core

P/N: 90600-0000

© 2023, FLIR Systems, Inc.

#90600-0000; r. 93988;

- T911869ACC; Ethernet cable M12 to RJ45F, 0.3 m
- T911183; Gigabit PoE injector 16 W, with multi-plugs
- T911997; Tripod
- T199609; Option, Macro mode 50/71/101 μm for 24°
- T300295; Option, Visual camera including MSX
- T300572; Option, Force password change at first-time use
- T199507; Gigabit PoE injector 15 W
- T300805; IR lens, f=5 mm (80°) with case

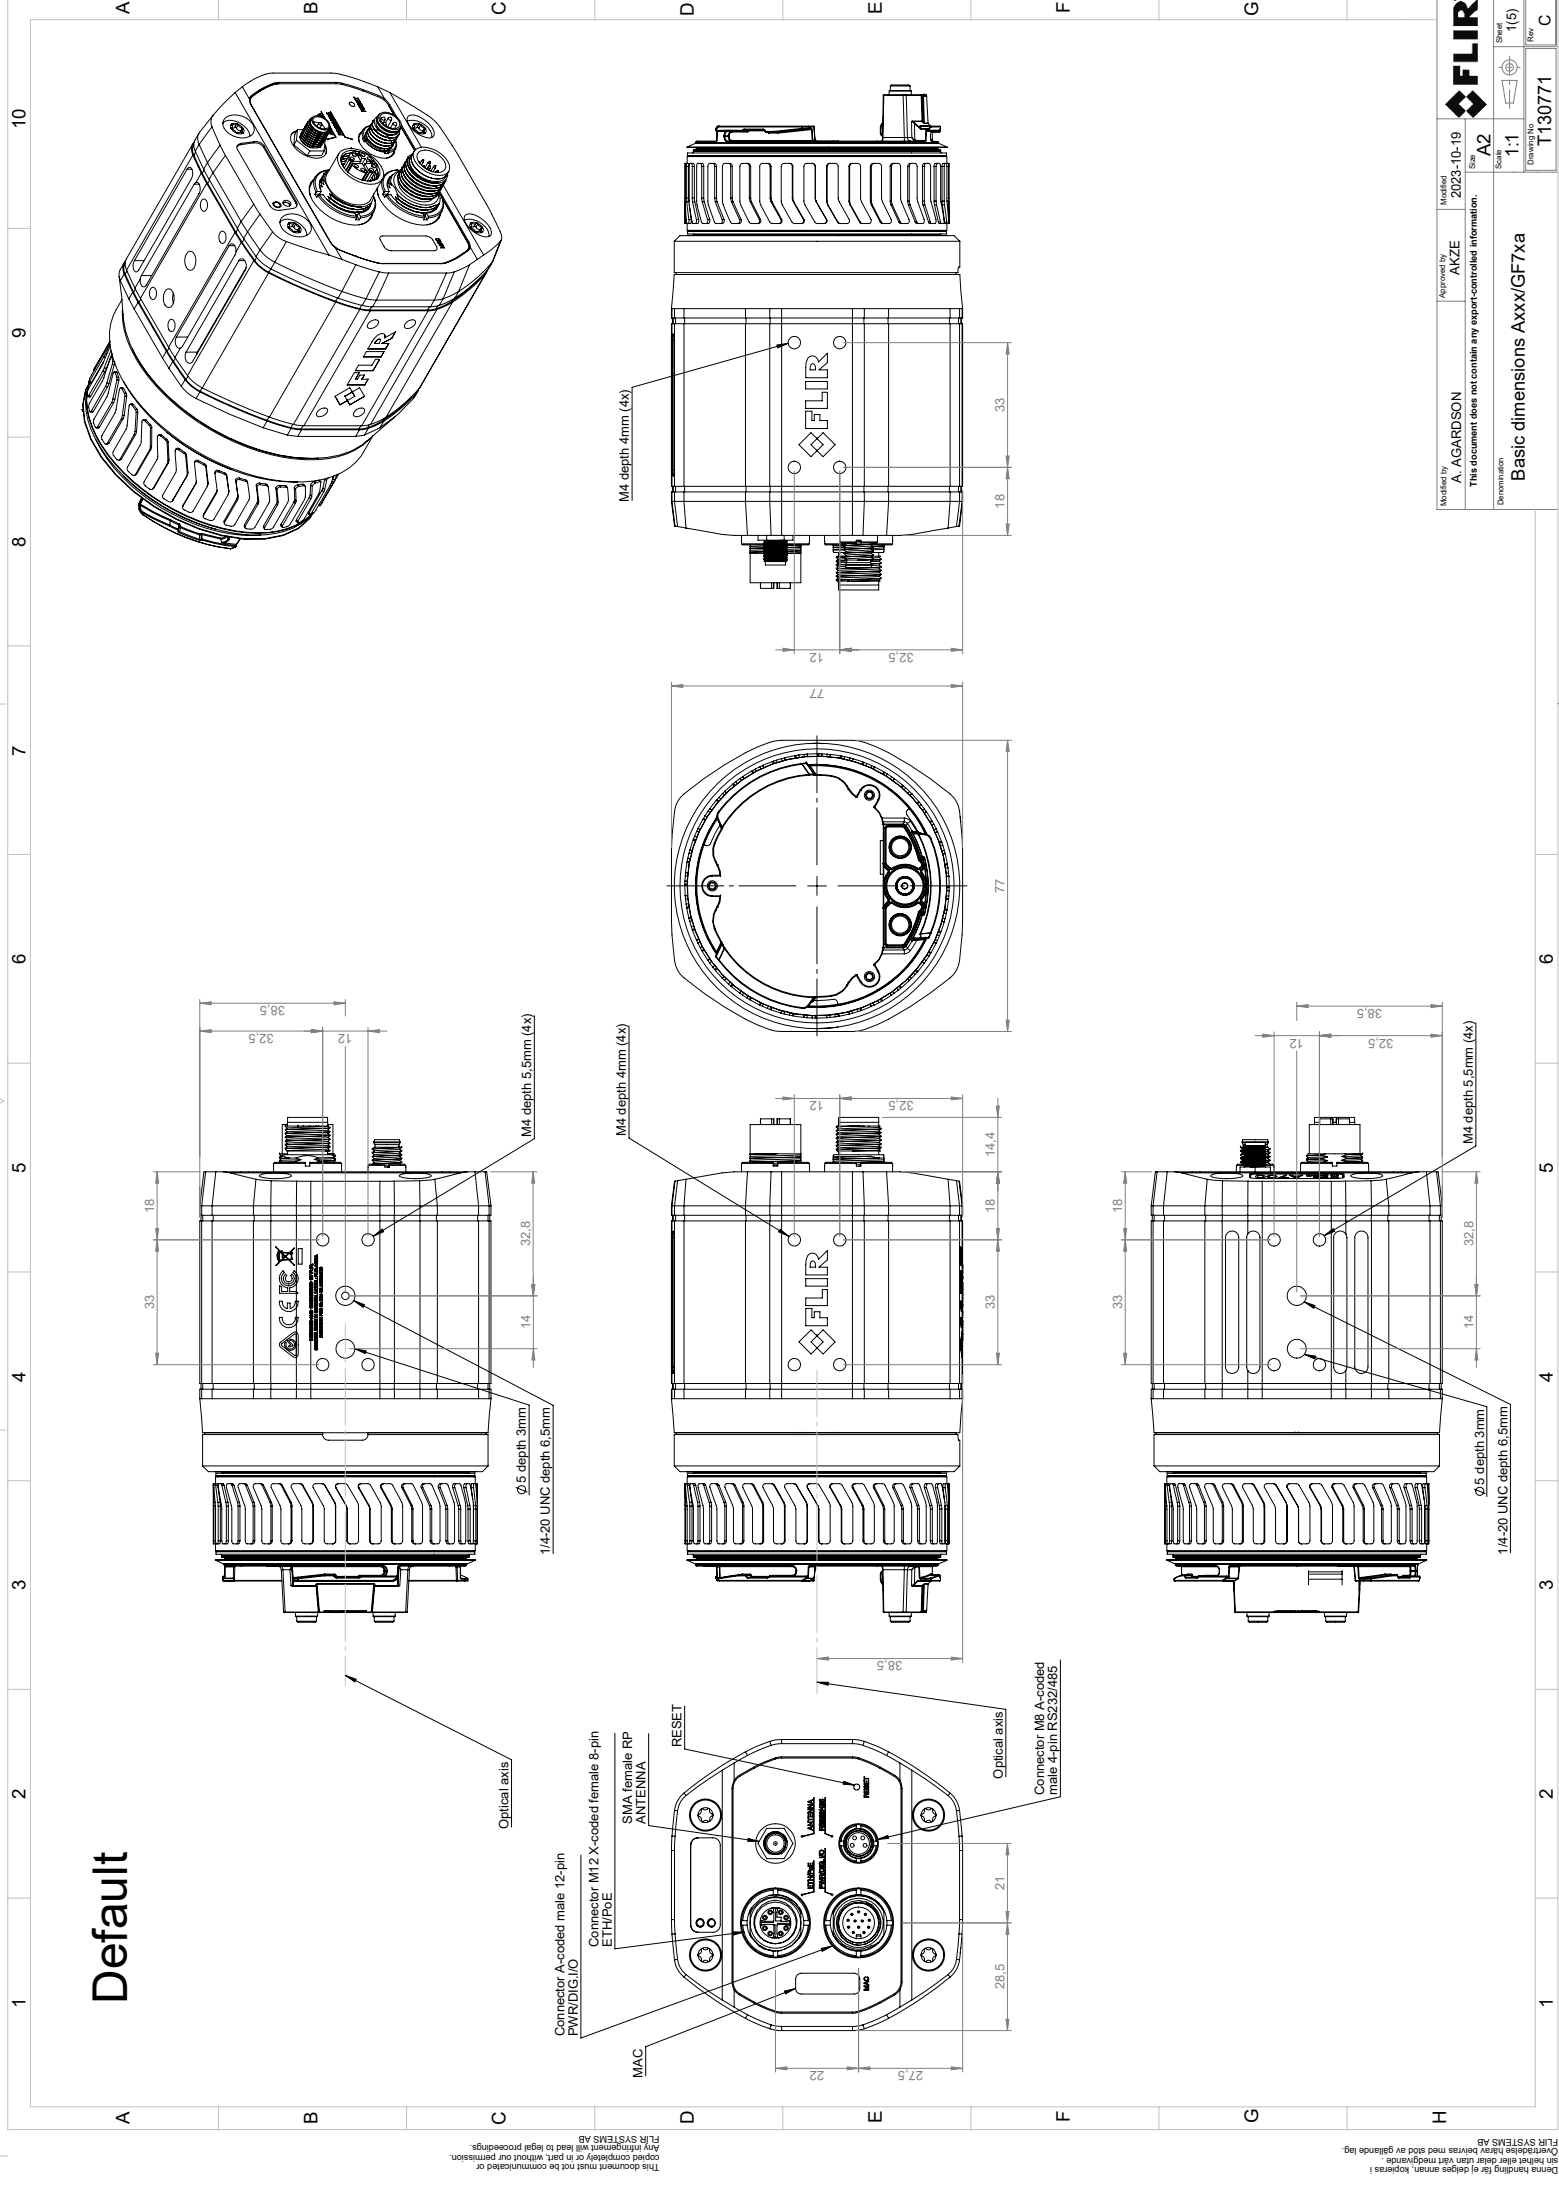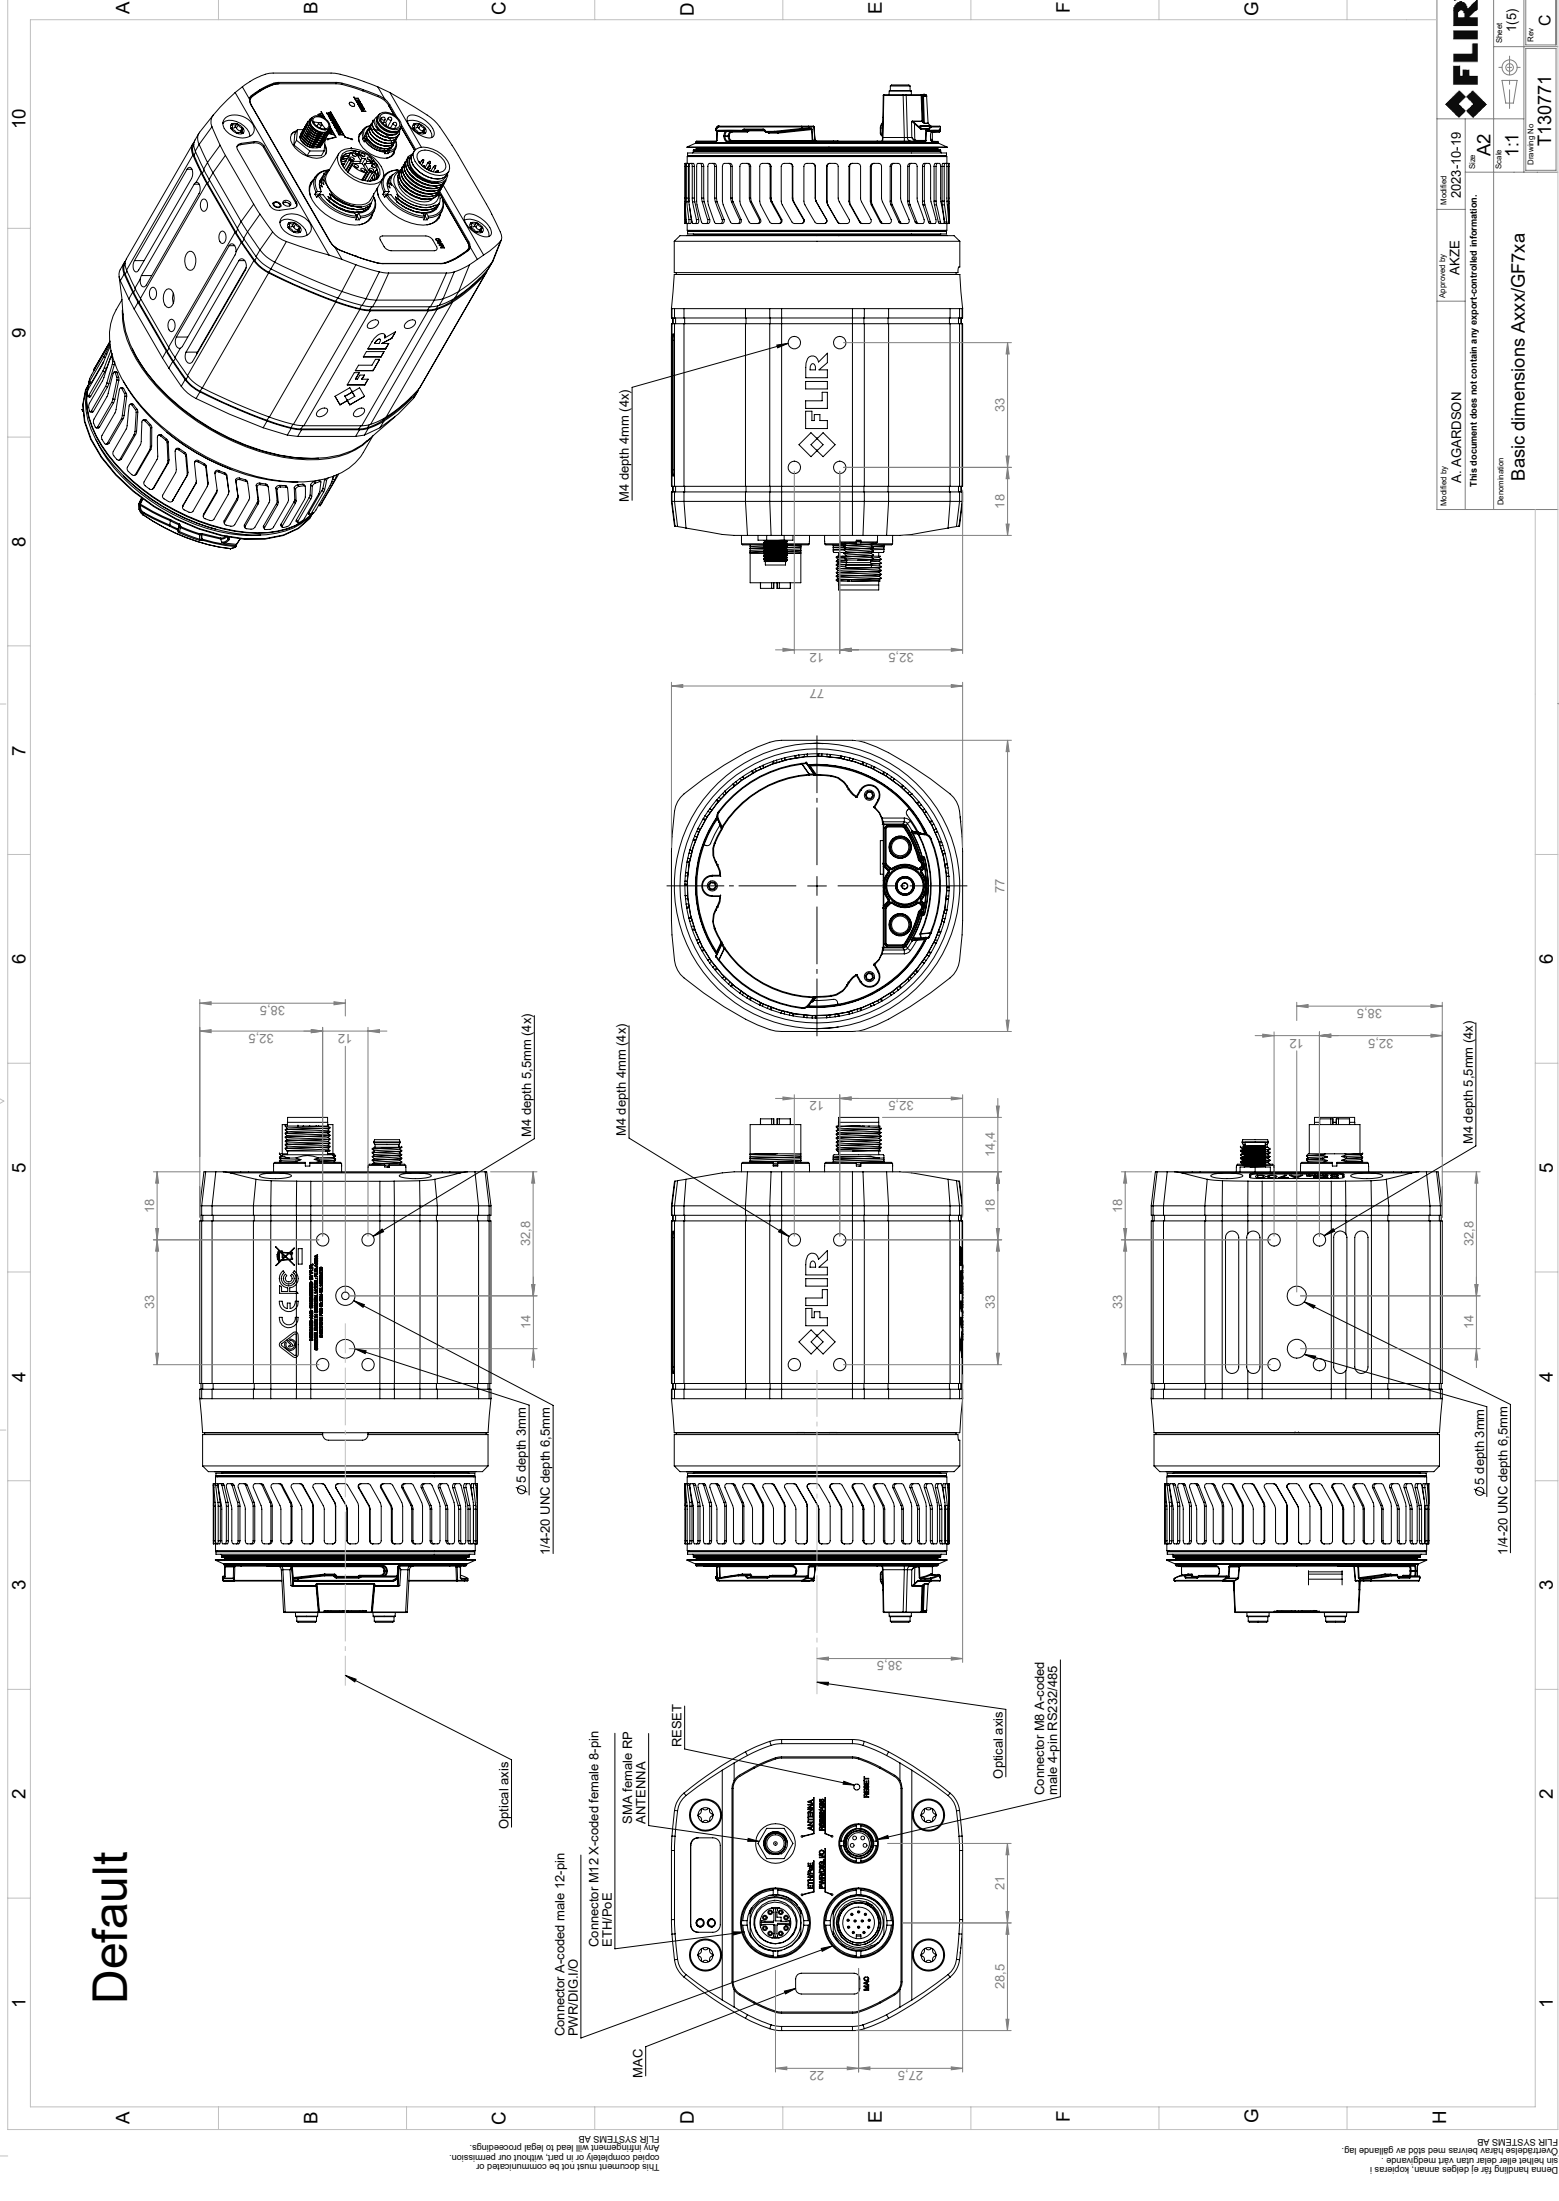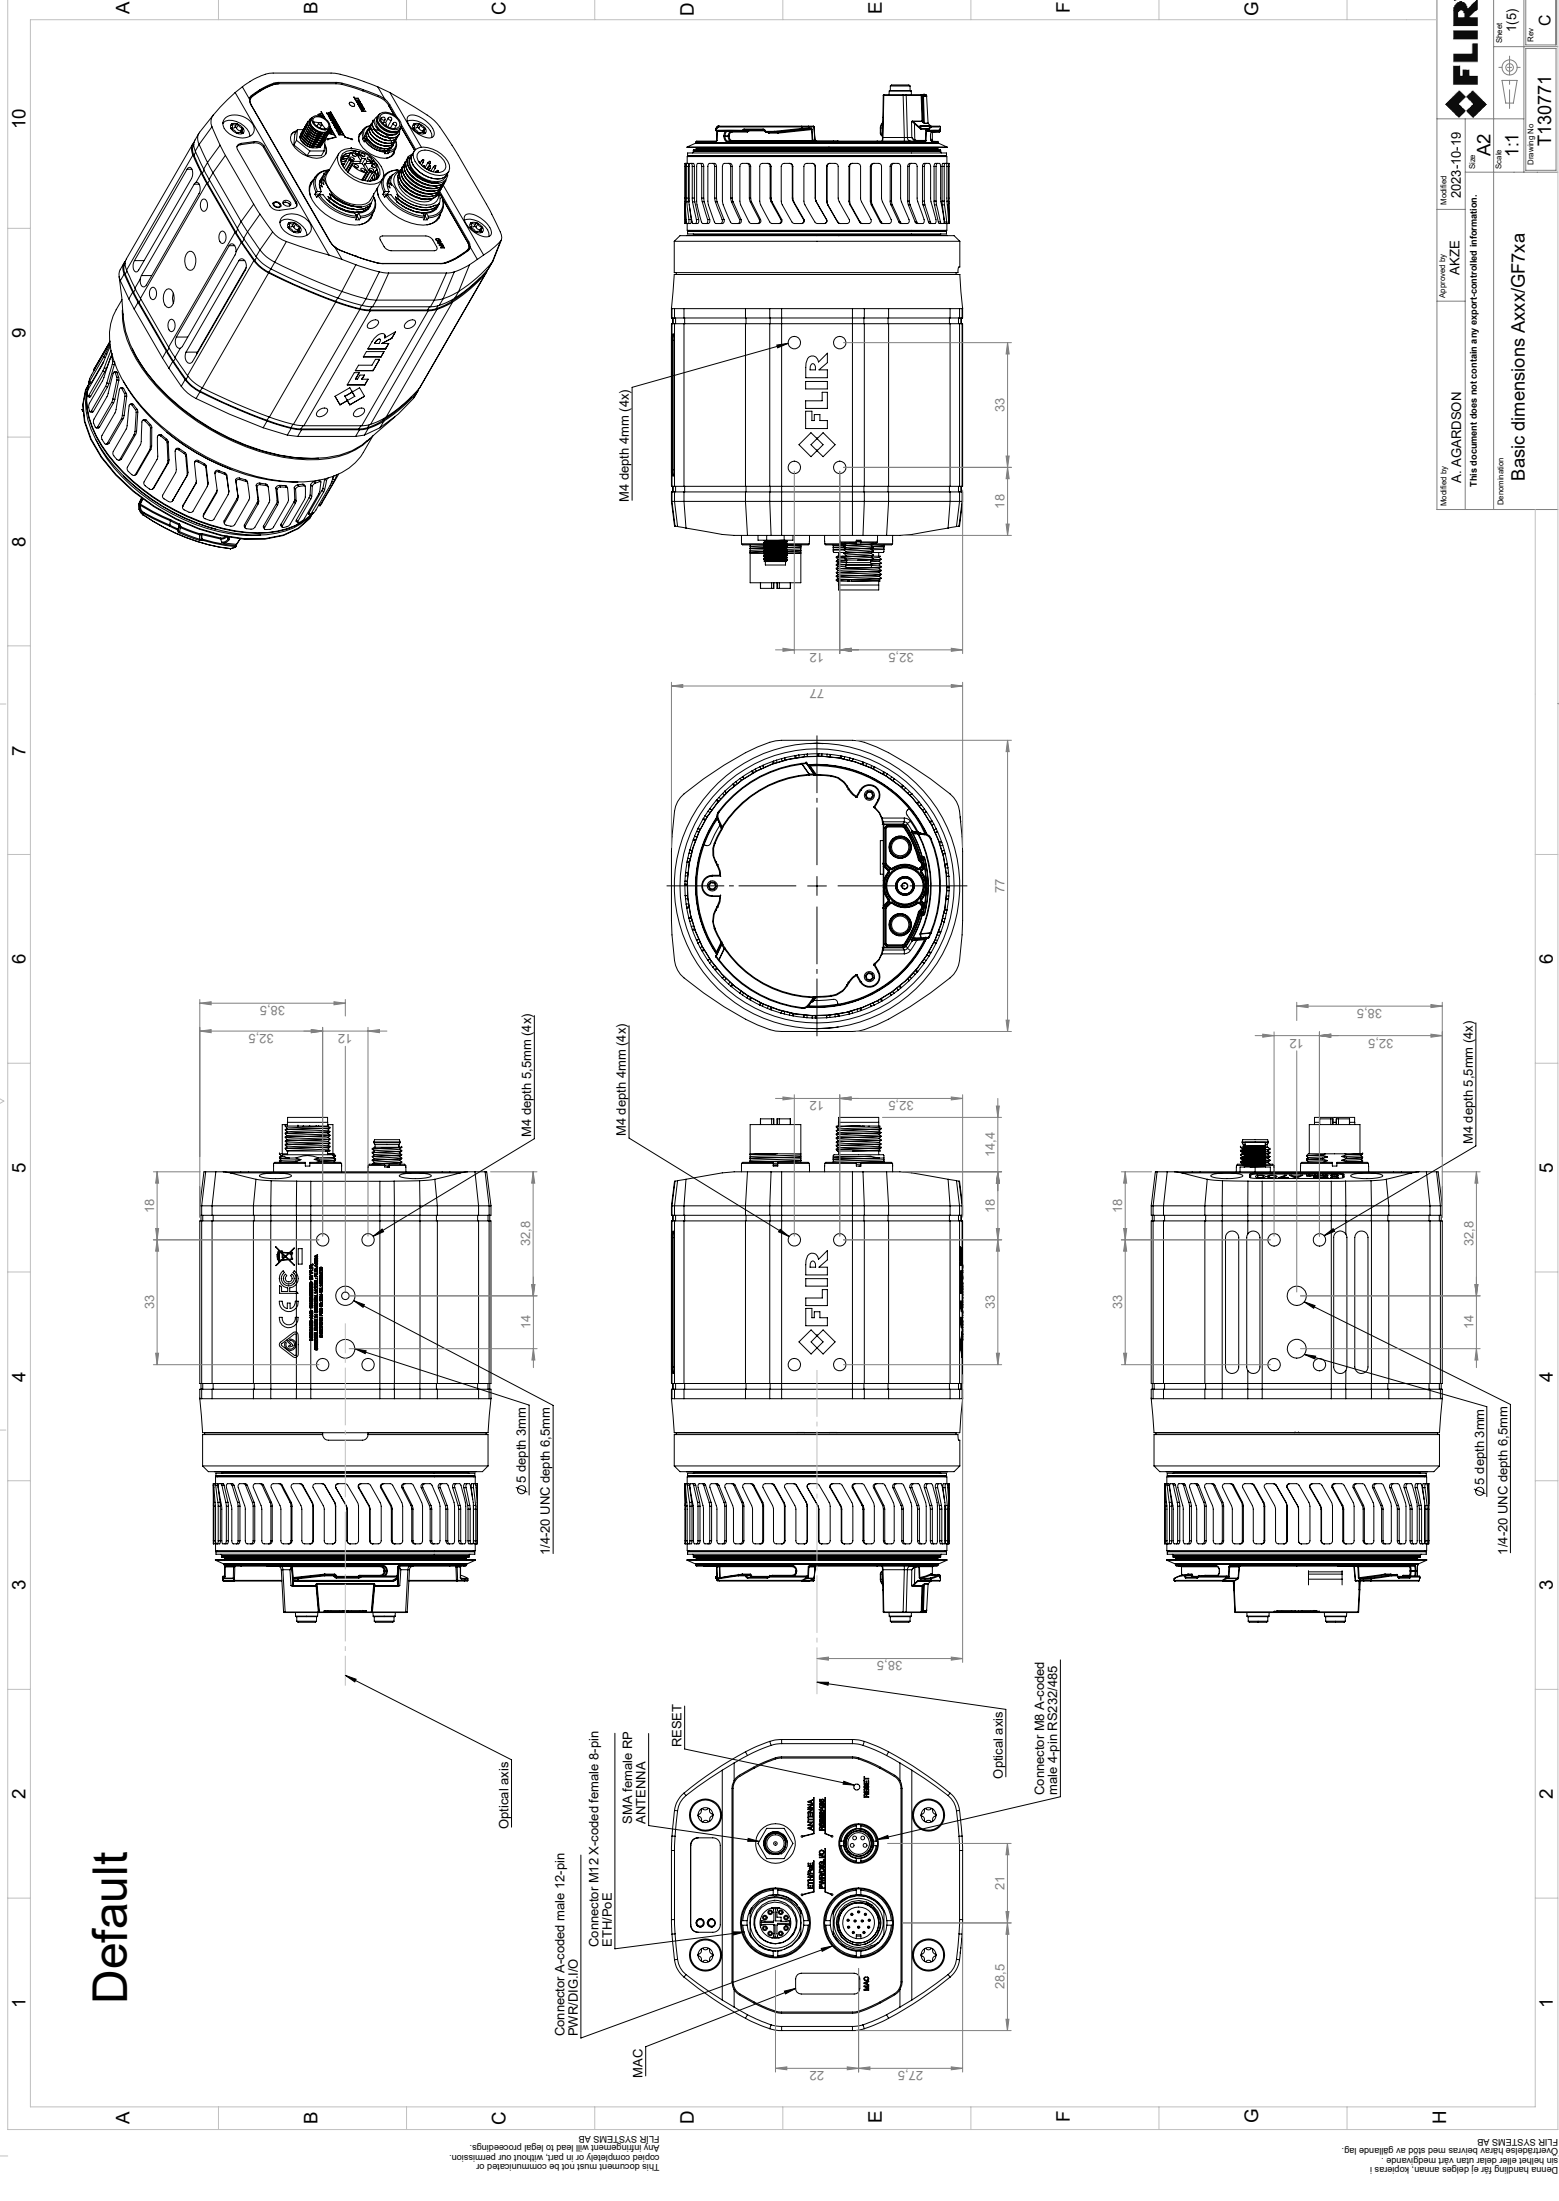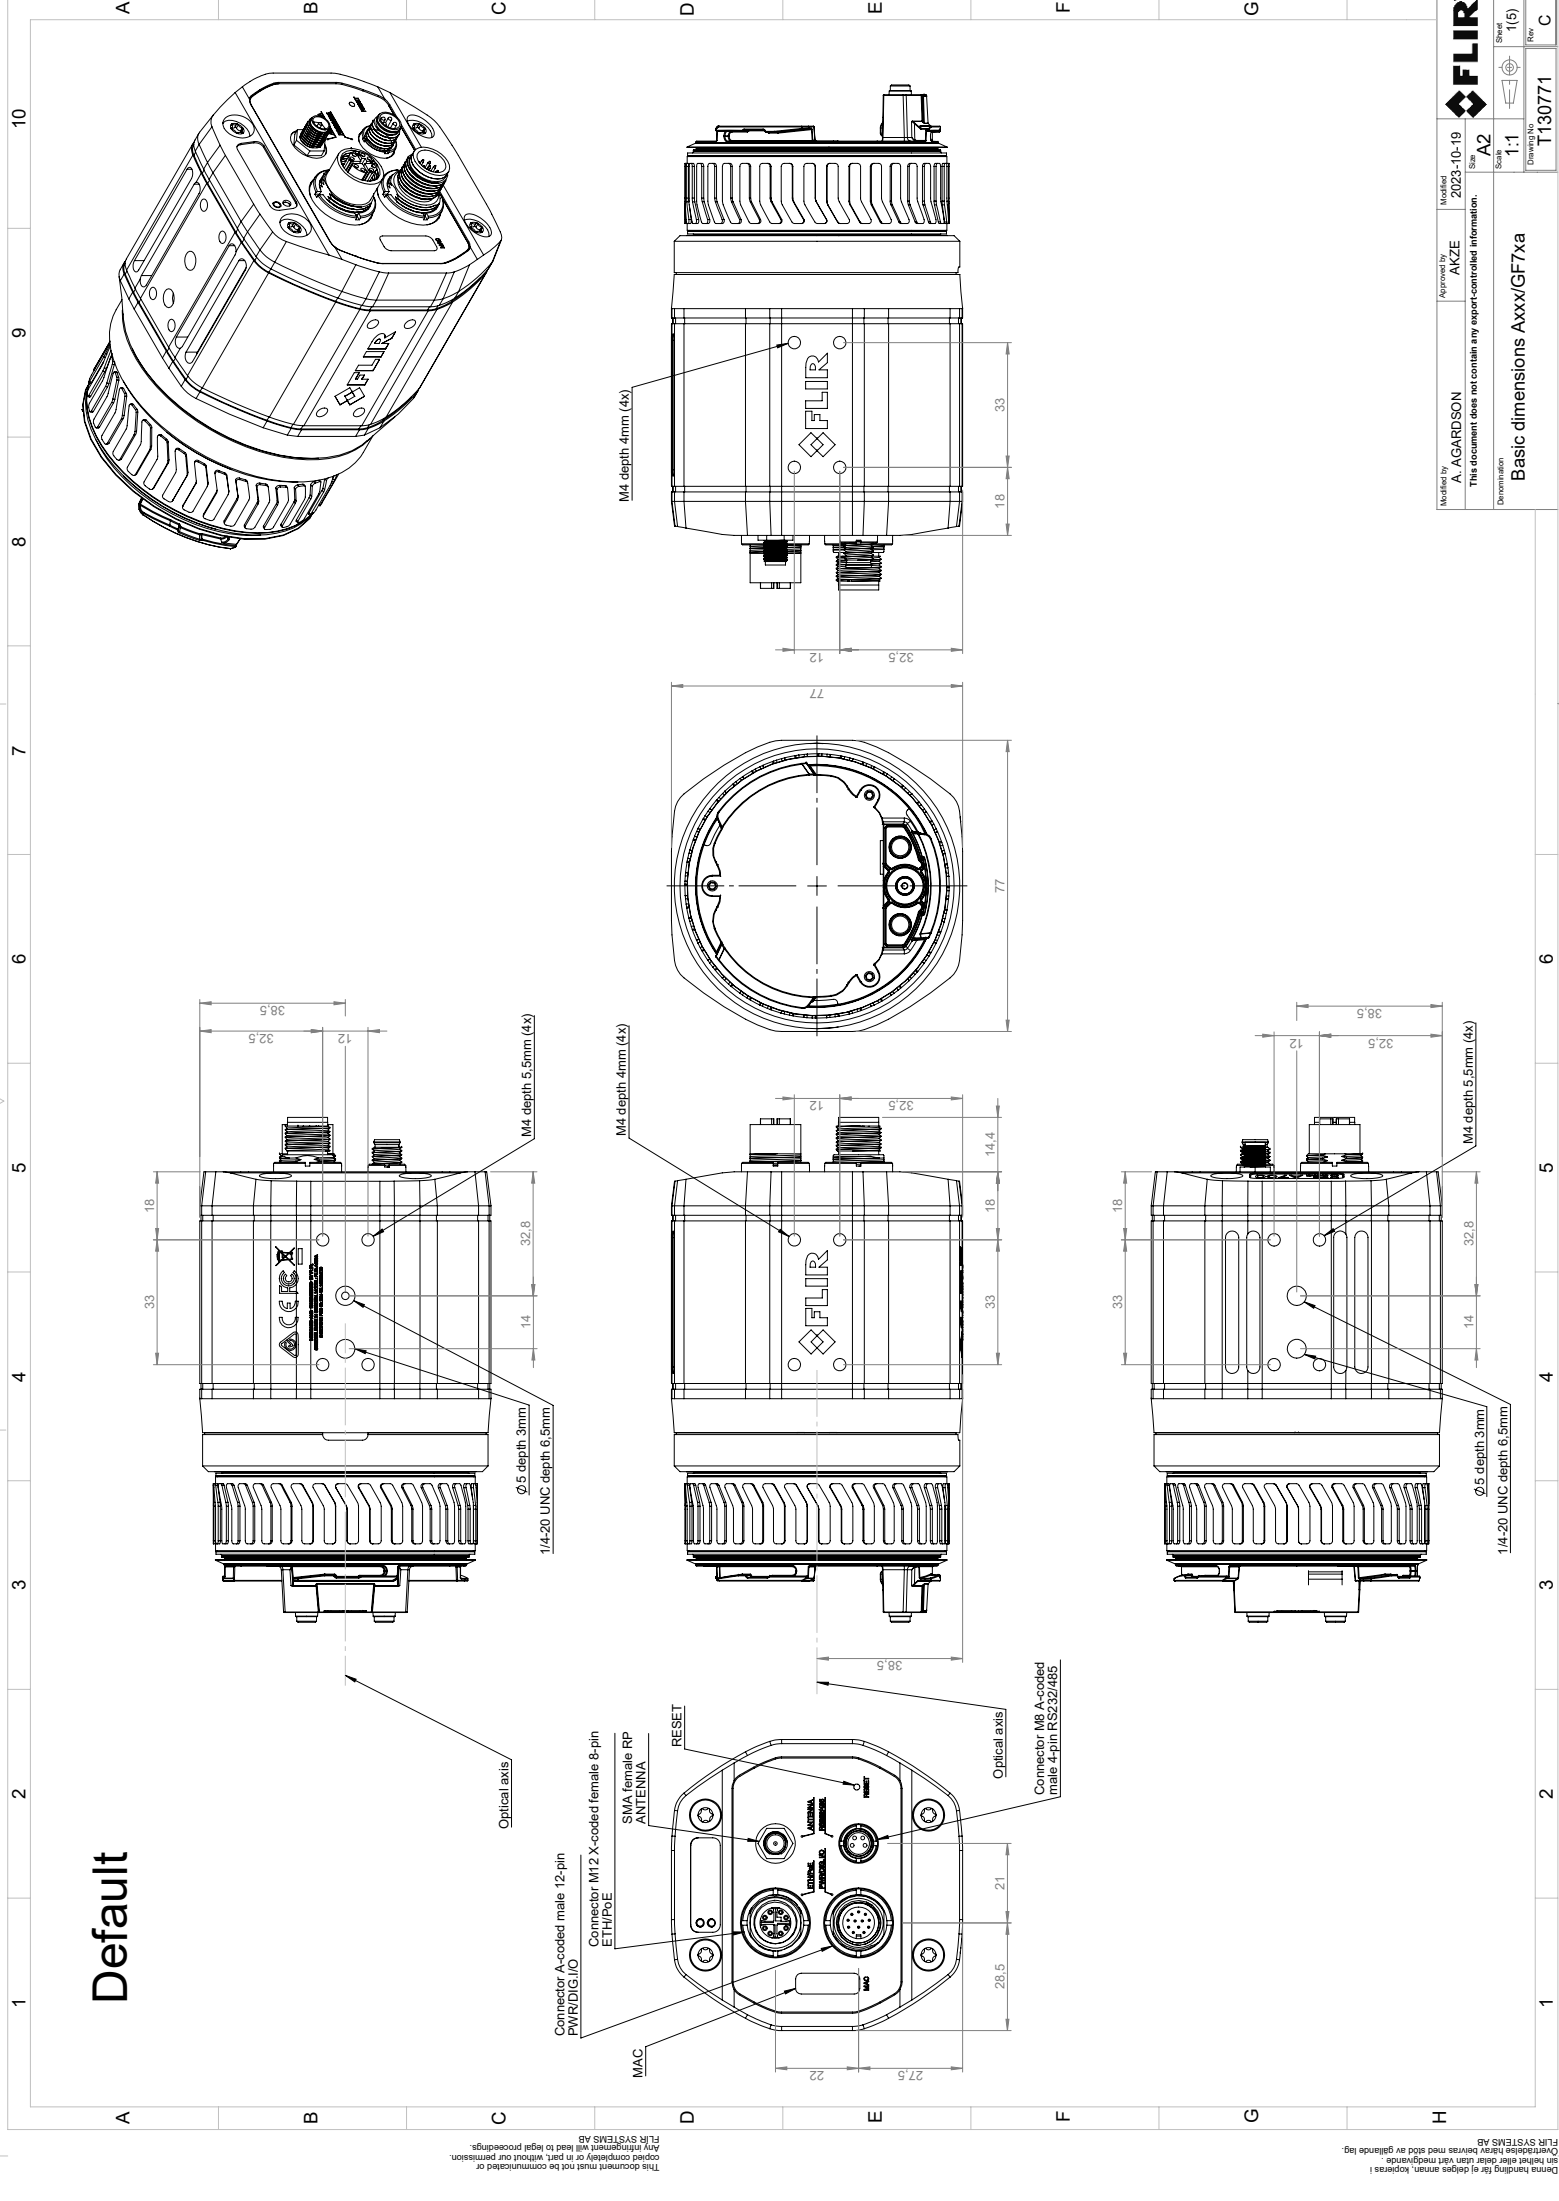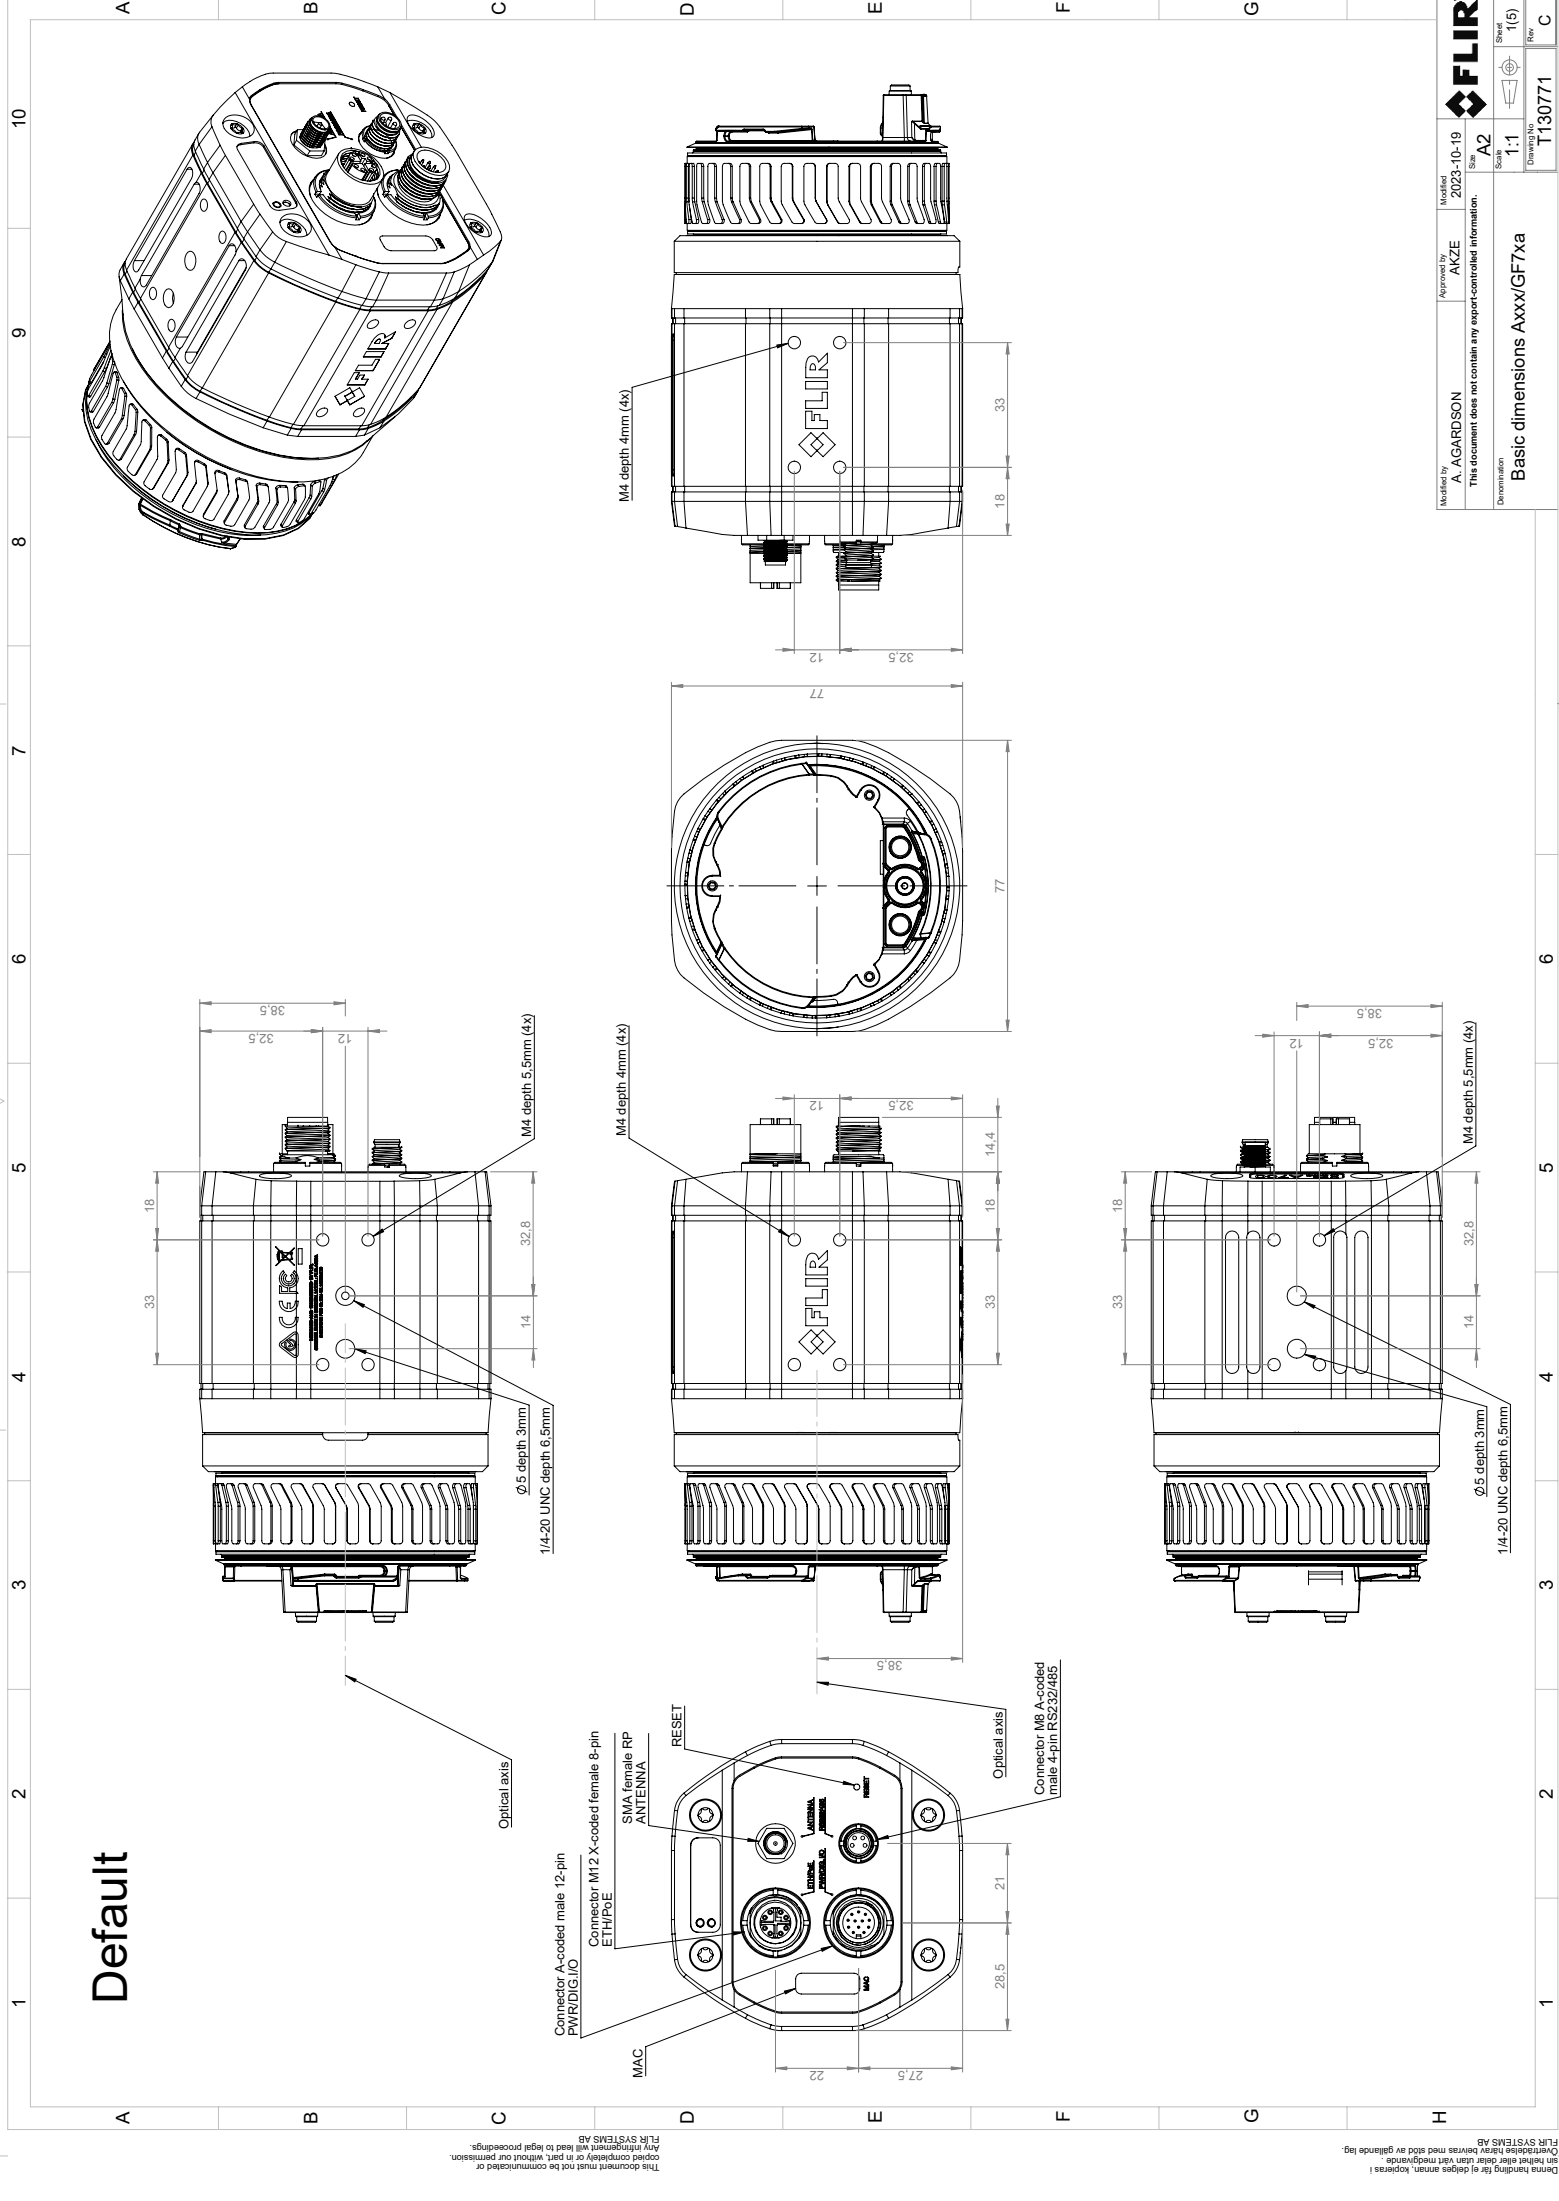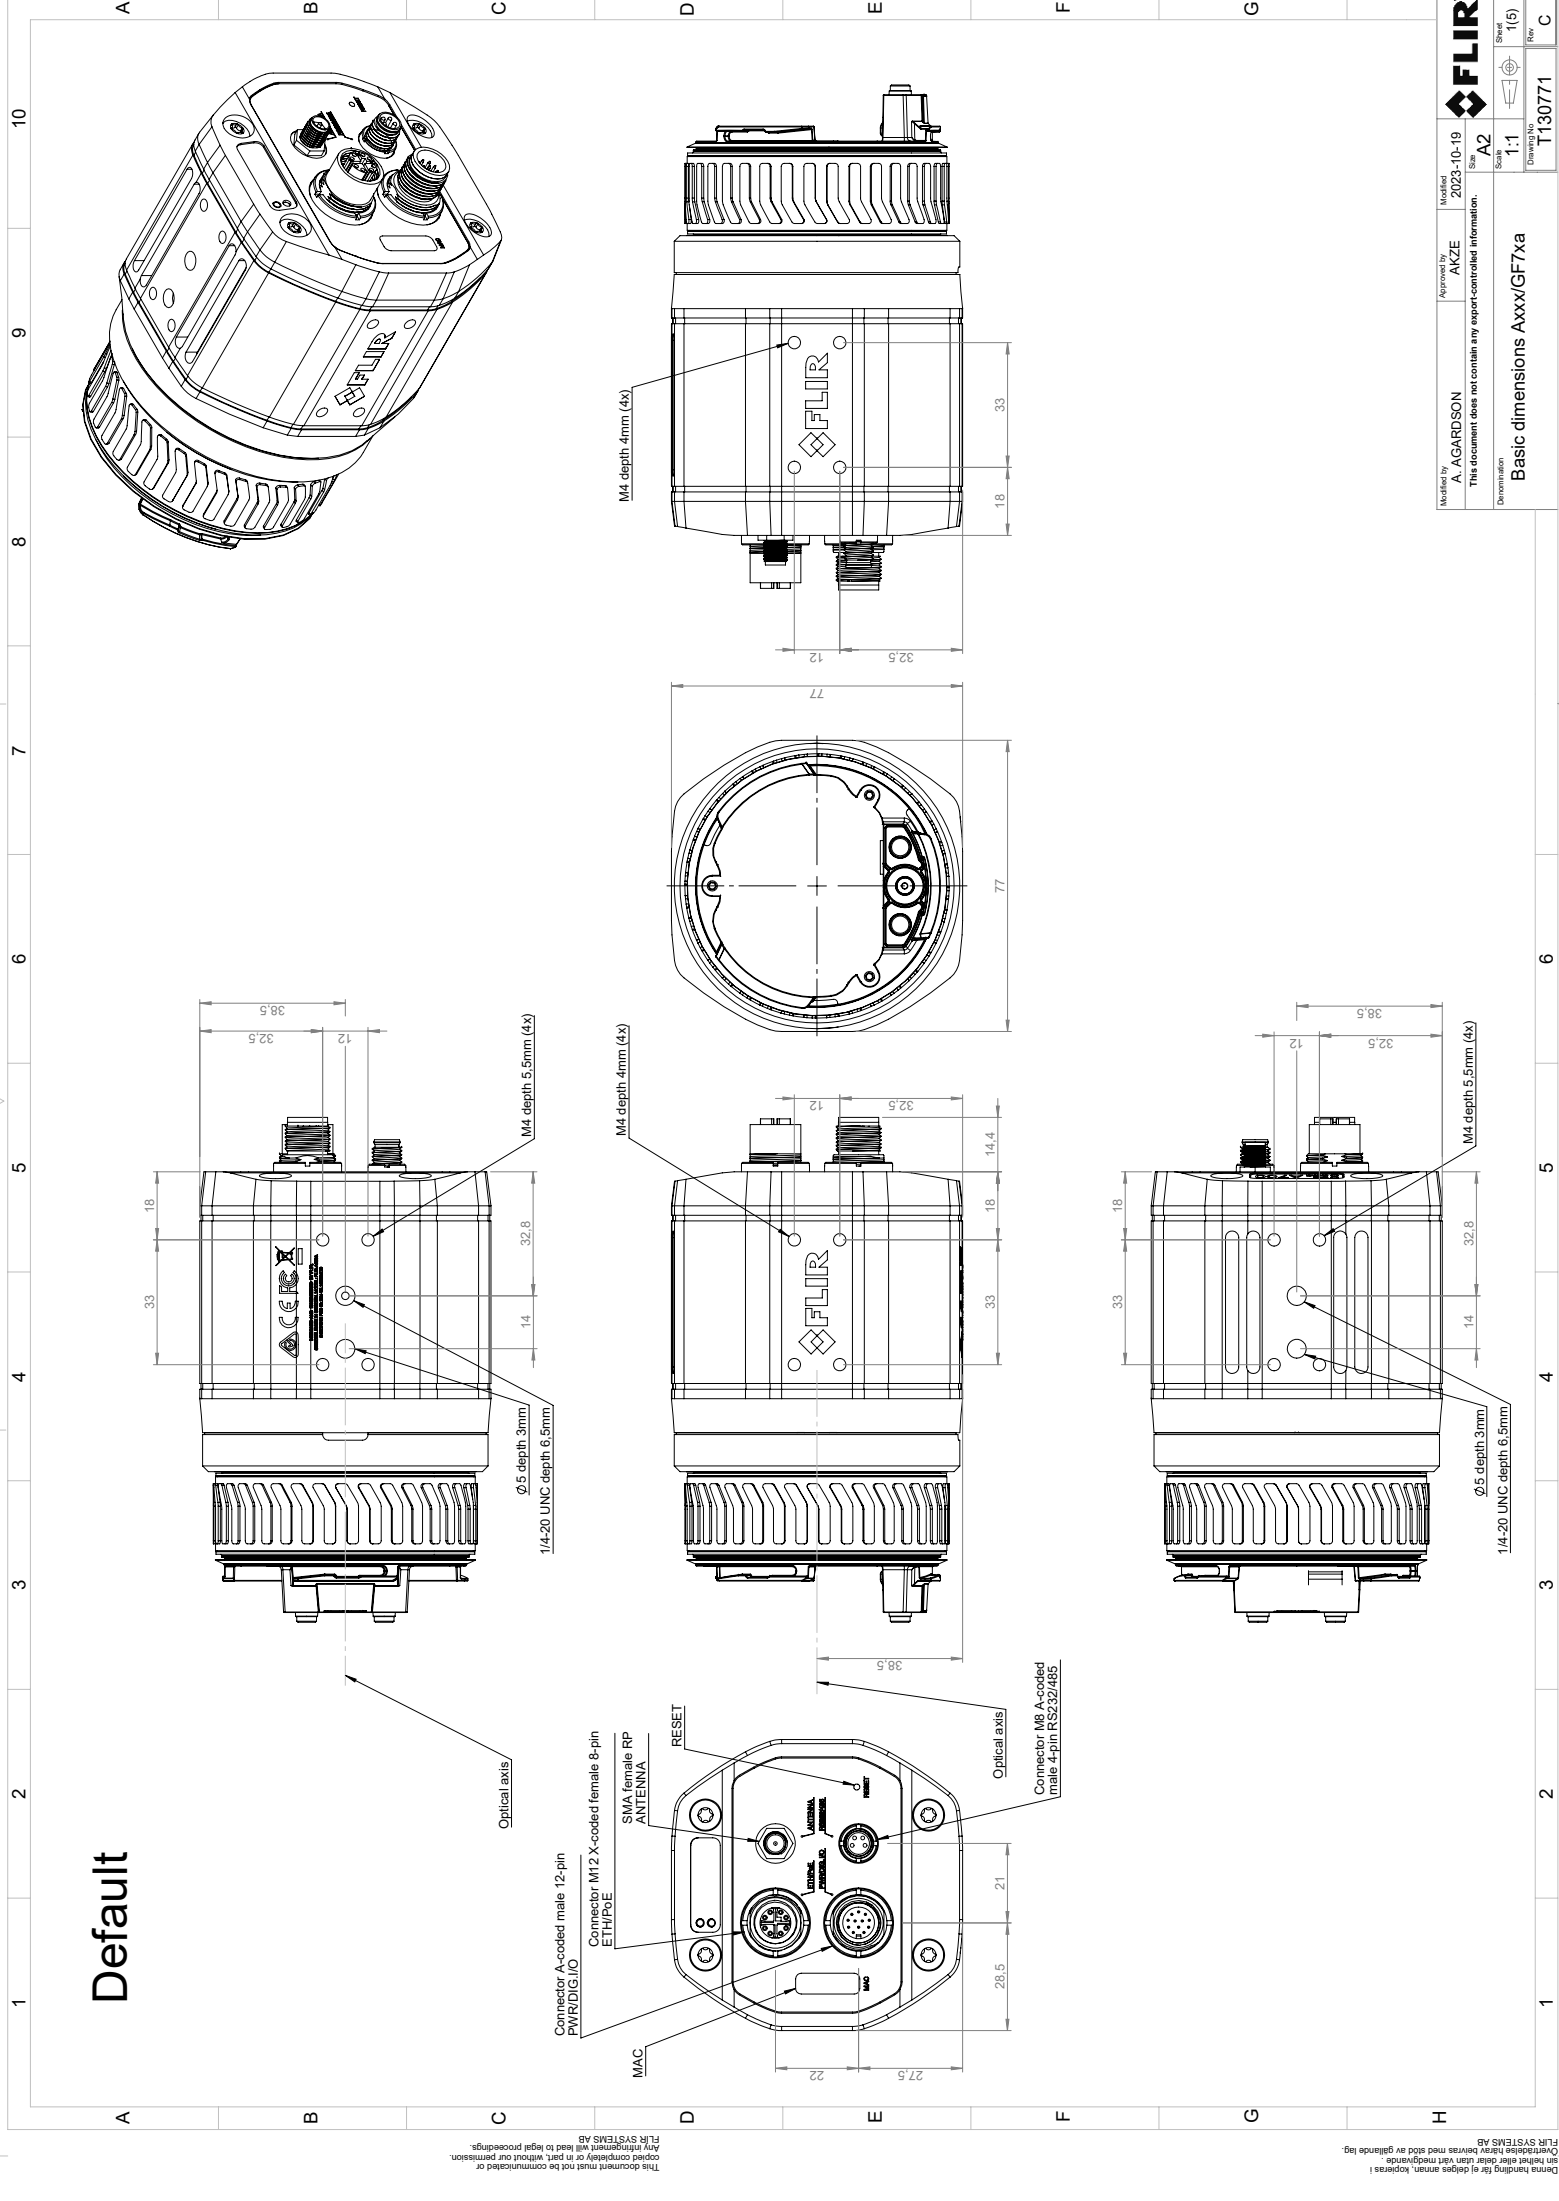[illegible]

Default

Drawing No.		Sheet	Rev.
T130771		1 (5)	
Drawing Scale		Size	Modified
1:1		A2	2023-10-19
Drawing Title		Approved by	Modified by
Basic dimensions Axxx/GF7xa		AKZE	A. AGARDSON
This document does not contain any expert-controlled information.			

This document must not be communicated or copied completely or in part, without our permission. Any infringement will lead to legal proceedings. FLIR SYSTEMS AB

Örning handling för ej delges annan, kopieras i sin helhet eller delar utan vårt medgivande. Översättningar till andra språk är förbjudna. FLIR SYSTEMS AB

Incl. STD Lenses & Macro

Optical axis

Connector A-coded male 12-pin
PWREDIGIO

Connector M12 X-coded female 8-pin
ETH/POE

SMA female RP
ANTENNA

RESET

MAC

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22

27.5

21

28.5

38.5

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22

27.5

21

28.5

38.5

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22

27.5

21

28.5

38.5

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22

27.5

21

28.5

38.5

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22

27.5

21

28.5

38.5

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22

27.5

21

28.5

38.5

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22

27.5

21

28.5

38.5

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22

27.5

21

28.5

38.5

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22

27.5

21

28.5

38.5

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22

27.5

21

28.5

38.5

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22

27.5

21

28.5

38.5

Optical axis

Connector M8 A-coded
male 4-pin RS232/485

22


27.5

21

Macro WD=18mm

Modified by A. AGARDSON	Approved by AKZE	Modified 2023-10-19	
This document does not contain any expert-controlled information.			Size A2
Discontinuation			Scale 1:1
Basic dimensions Axxx/Gf7xa			Sheet 2(s)
			Rev. C
			Drawing No. T130771






Incl. IR Lens 6 deg

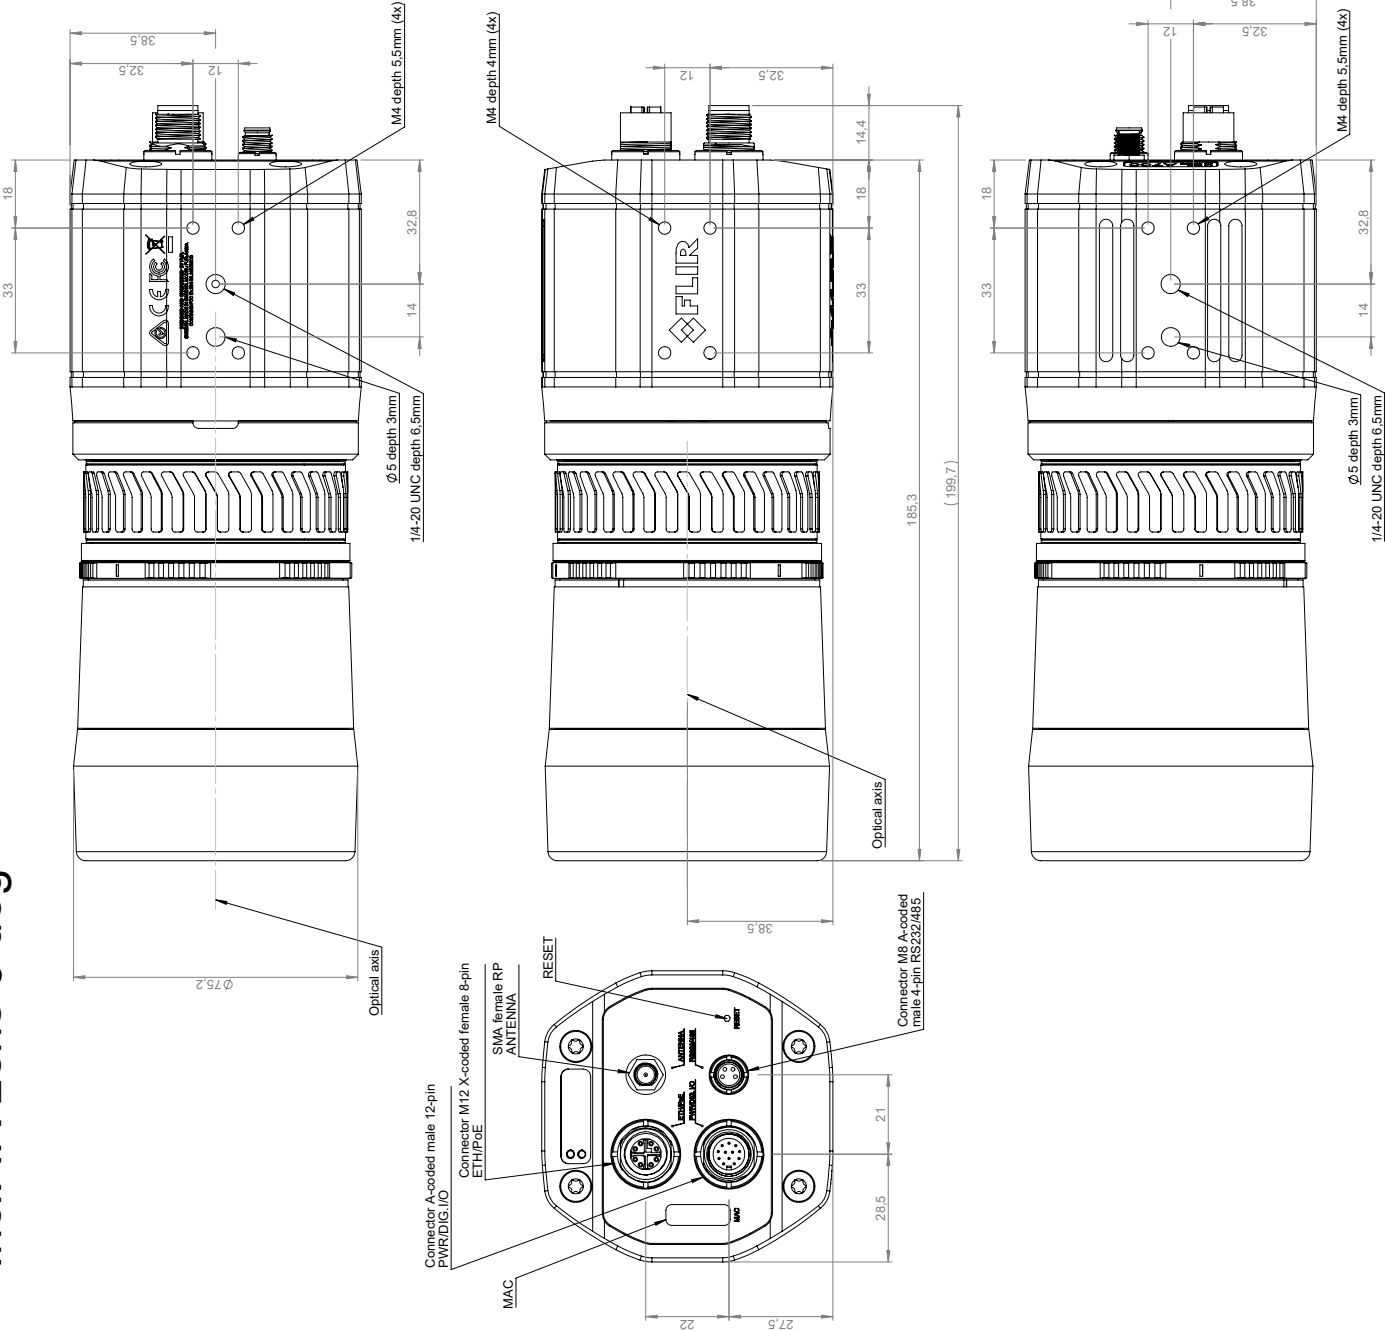

Basic dimensions for cameras with focal length:
f= 70mm

Modified by	Approved by	Modified	Size	Scale	Sheet	Rev
A. AGARDSON	AKZE	2023-10-19	A2	1:1	3(5)	C
This document does not contain any export-controlled information.						
Drawing No.						
Basic dimensions Axxx/GF7xa						

Incl. IR Lens DFOV

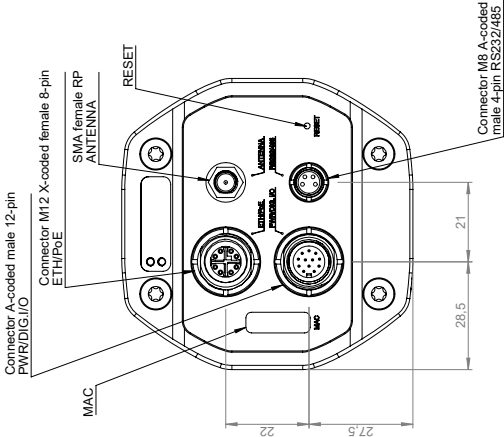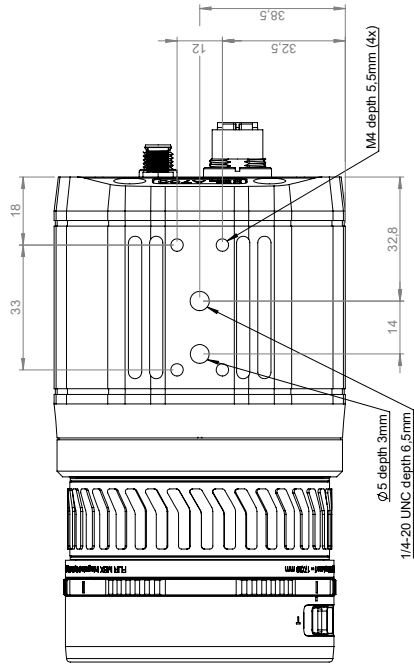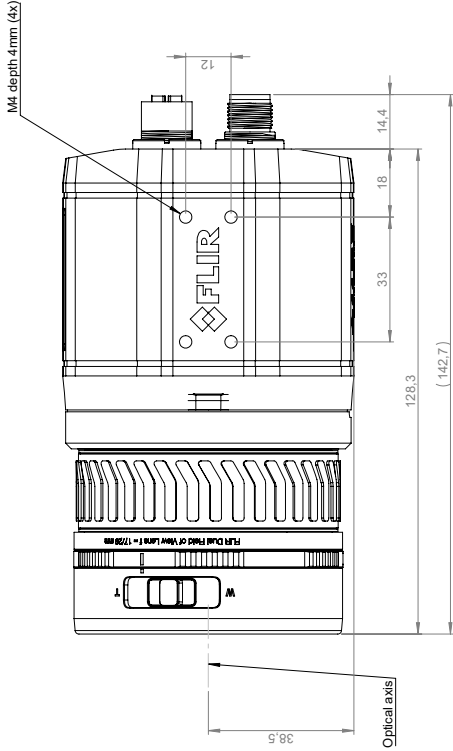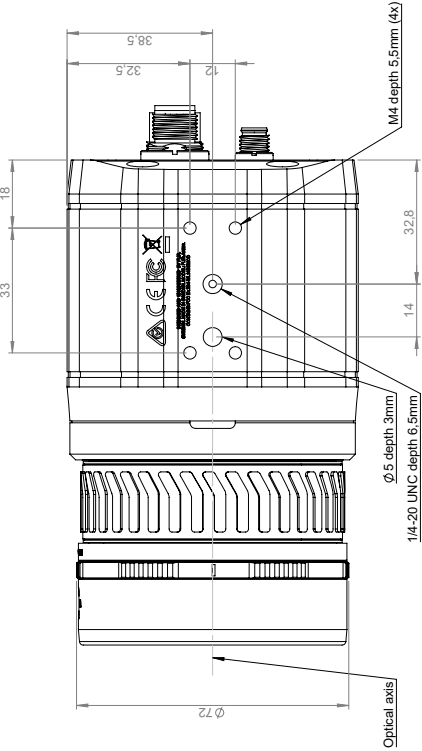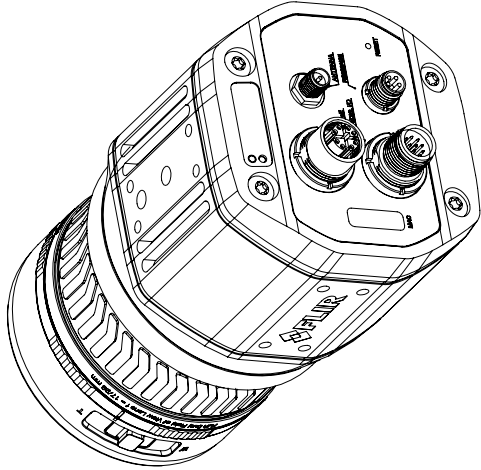

Basic dimensions for cameras with DFOV lens:
f= 17729 mm


Modified by	Approved by	Modified	FLIR
A. AGARDSON	AKZE	2023-10-19	
This document does not contain any export-controlled information.			Size A2
Scale	1:1	Sheet 4(5)	Rev
Denotation	Basic dimensions Axxx AF		
Document No.	T130771		

Incl. IR Lens 80 deg

Basic dimensions for cameras with focal length:
f = 5mm

Modified by	Approved by	Modified	Size	Sheet	Rev.
A. AGARDSON	AKZE	2023-10-19	A2	5(5)	C
This document does not contain any expert-controlled information.					
Drawn by	Checked by	Released by	Scale	Sheet	Rev.
T130771			1:1	5(5)	C

Basic dimensions Axxx AF

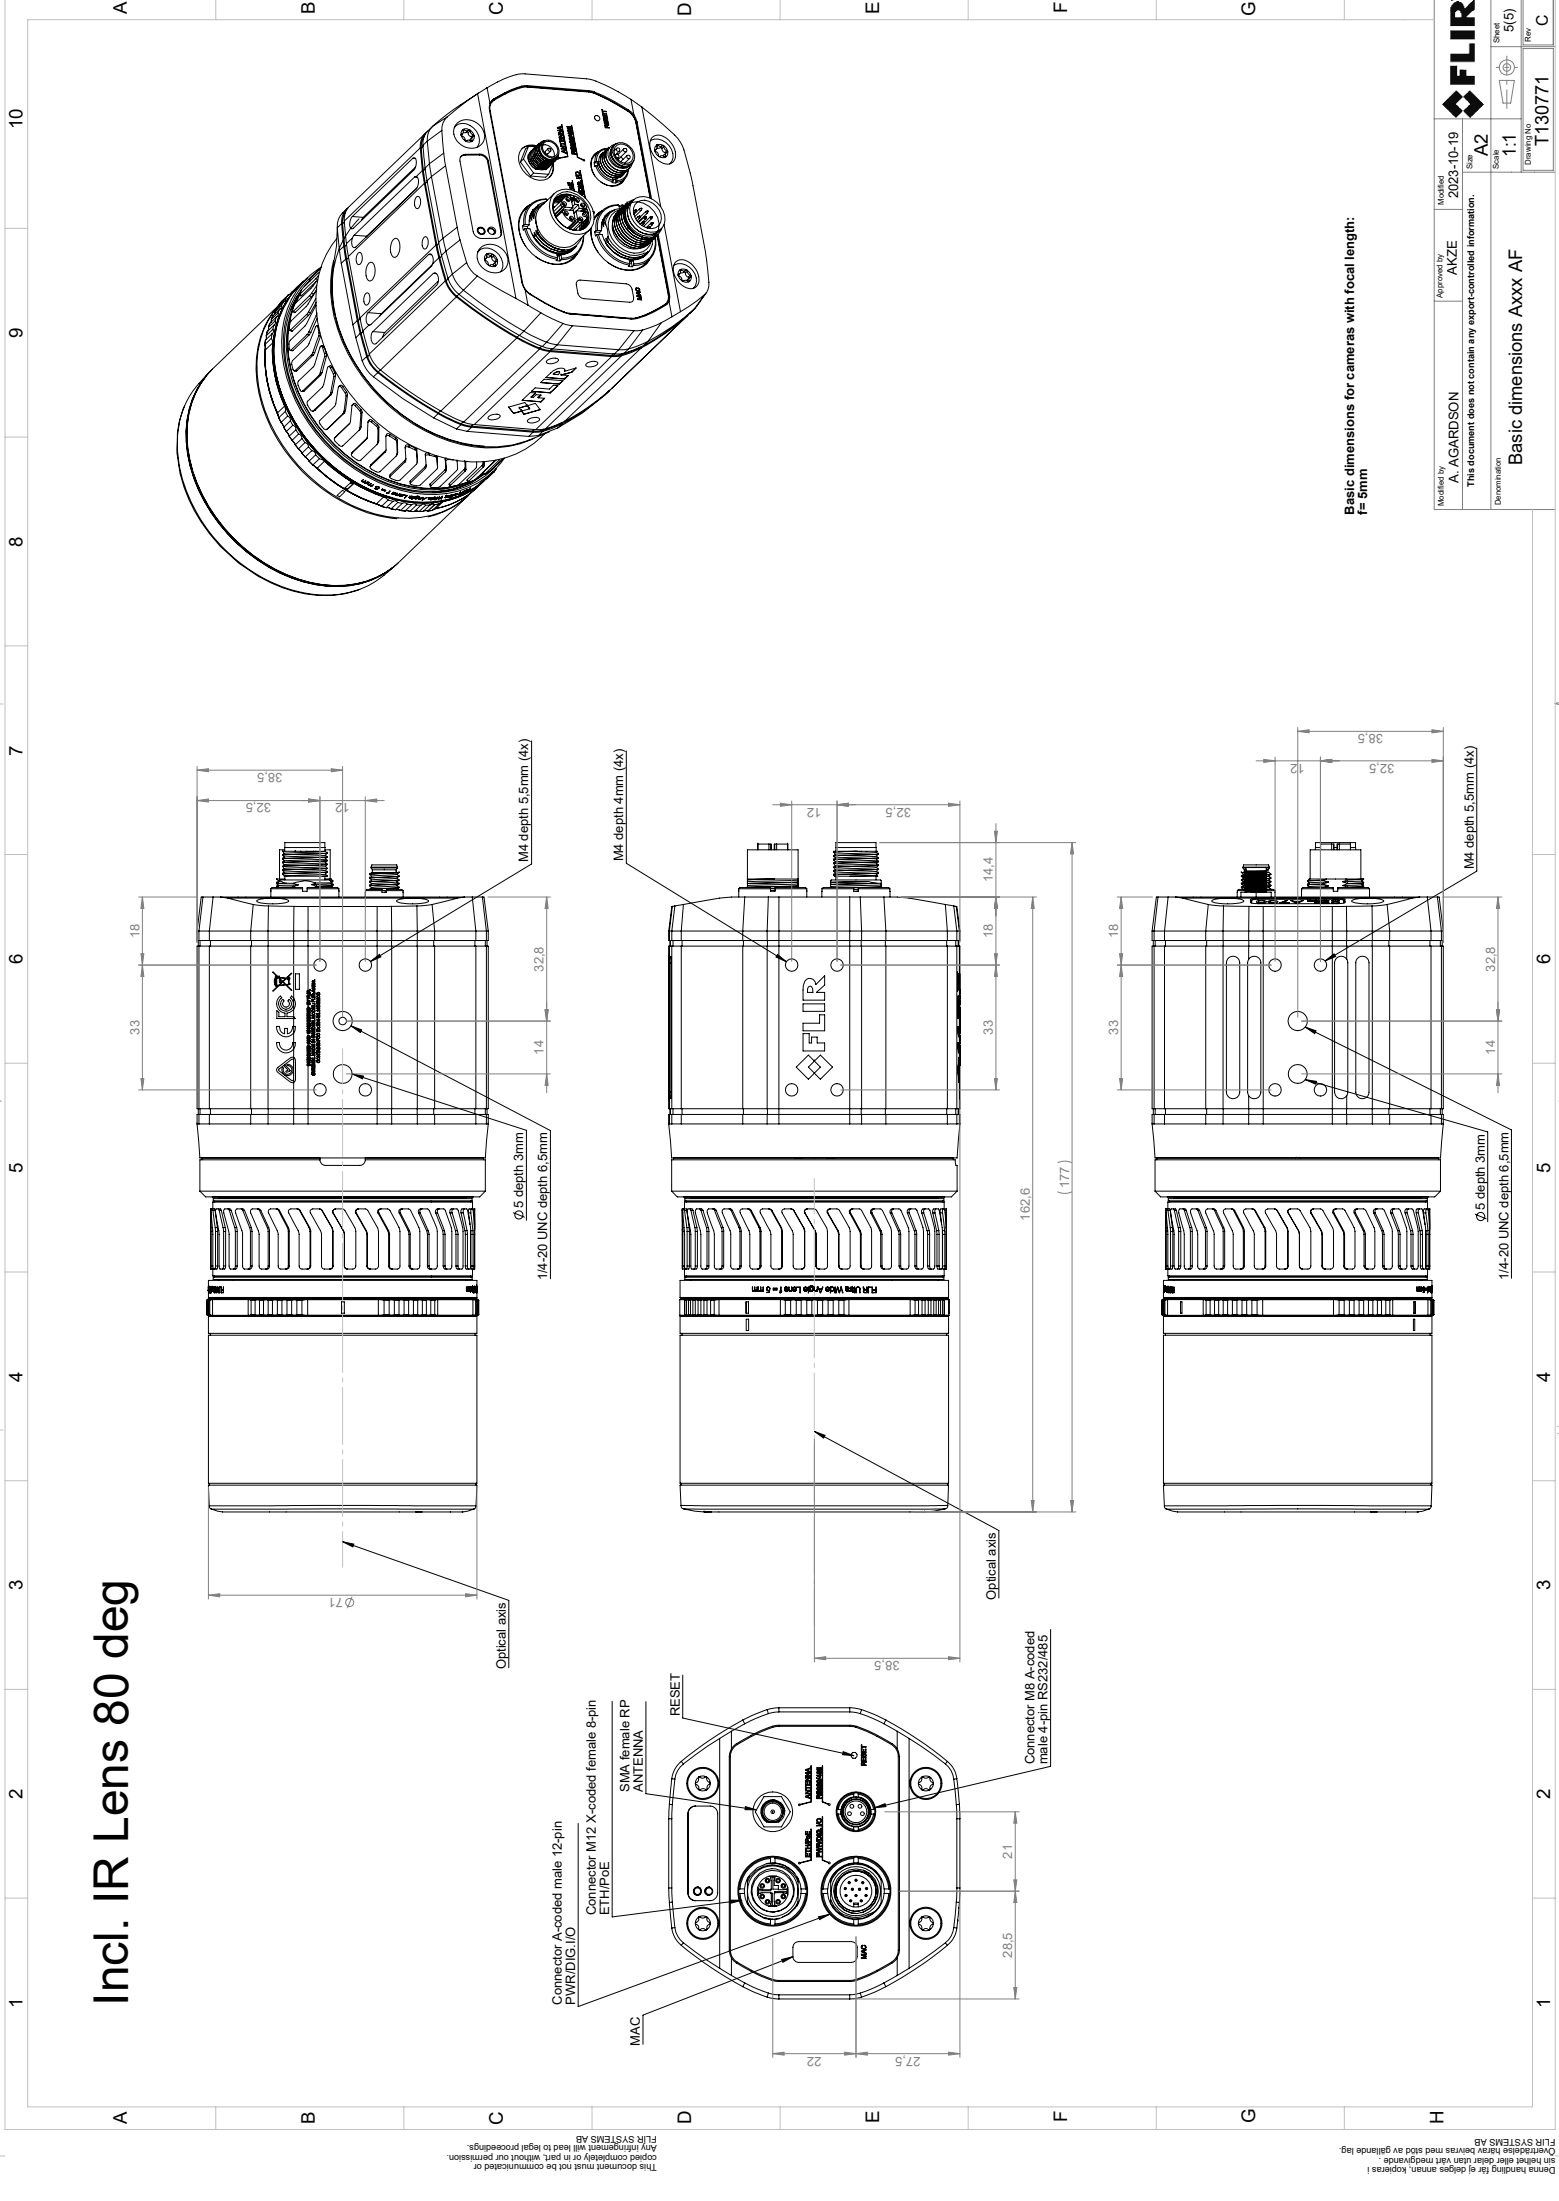

Incl. IR Lens 80 deg

Basic dimensions for cameras with focal length:
F = 5mm

Modified by	Approved by	Modified	Sheet	Rev.
A. AGARDSON	AKZE	2023-10-19	A2	C
This document does not contain any expert-controlled information.				
Drawn by	Scale	Sheet	Sheet	Rev.
AKZE	1:1	5(5)	T130771	C
Basic dimensions Axxx AF				

Incl. IR Lens 80 deg

Basic dimensions for cameras with focal length:
F = 5mm

Modified by	Approved by	Modified	Sheet	Rev.
A. AGARDSON	AKZE	2023-10-19	A2	C
This document does not contain any expert-controlled information.				
Drawn	Scale	Drawn	Sheet	Rev.
1:1	5(5)	T130771		
Basic dimensions Axxx AF				