



FLIR A700 Thermal Core

P/N: 85900-0000

Copyright

© 2025, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 85900-0000

Release: AB

Commit: 101571

Language: en-US

Modified: 2025-01-08

Formatted: 2025-01-08

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General

When a camera is ordered the following must be selected, as a minimum:

- one of the camera bodies:
 - FLIR A400 Thermal Core
 - FLIR A500 Thermal Core
 - FLIR A700 Thermal Core
- one of the configurations:
 - Smart Sensor configuration
 - Image Streaming configuration
- one (or several) of the lenses:
 - IR lens, f=70 mm (6°) with case
 - IR lens, f=29 mm (14°)
 - IR lens, f=17 mm (24°)
 - IR lens, f=10 mm (42°)
 - IR lens, f=5 mm (80°) with case
 - IR lens Dual FOV, f=17/29 mm (24°/14°)

For orders of more than one lens, select the primary lens to be mounted on the Thermal Core camera body at delivery. The additional lenses are then delivered in separate boxes. The IR lens, f=70 (6°) and IR lens, f=5 mm (80°) are always delivered in a case.

Please note that other P/Ns are used when the lenses are ordered as accessories.

The following options are available:

- Antenna WLAN 2.4/5 GHz + Wi-Fi
- Option, Visual camera including MSX
- Advanced Smart Sensor configuration
- Advanced Image Streaming configuration
- Option, Macro mode 50/71/101 µm for 24°

Note the following:

The *Advanced Smart Sensor configuration* and the *Advanced Image Streaming configuration* require the *Smart Sensor configuration* and the *Image Streaming configuration*, respectively.

Imaging and optical data	
Infrared resolution	640× 480 pixels
Thermal sensitivity (NETD)	<40 mK, 80° @ +30°C (86°F) <25 mK, 42° @ +30°C (+86°F) <40 mK, 24° @ +30°C (+86°F) <40 mK, 14° @ +30°C (+86°F) <40 mK, 6° @ +30°C (+86°F) <50 mK, Macro lens @ +30°C (+86°F) <25 mK, 24° f/1.0 @ +30°C (+86°F)
Field of view (FOV)	Depending on lens used; see lens specification
Minimum focus distance	Depending on lens used; see lens specification
Focal length	Depending on lens used; see lens specification
Spatial resolution (IFOV)	Depending on lens used; see lens specification

P/N: 85900-0000

© 2025, FLIR Systems, Inc.

#85900-0000; r. AB/101571; en-US

Imaging and optical data	
Lens identification	Automatic
f-number	Depending on lens used; see lens specification
Image frequency	30 Hz
Focus	- One-shot contrast - Motorized - Manual
Detector data	
Focal plane array/spectral range	Uncooled microbolometer/7.5–14 μm
Detector pitch	12 μm
Measurement	
Camera temperature range	–20 to 120°C (–4 to 248°F) 0 to 650°C (32 to 1202°F) 300 to 2000°C (572 to 3632°F)
Object temperature range and accuracy (for ambient temperature 15–35°C (59–95°F))	- Range –20 to 120°C (–4 to 248°F): –20 to 100°C (–4 to 212°F), accuracy $\pm 2^\circ\text{C}$ ($\pm 3.6^\circ\text{F}$) 100 to 120°C (212 to 248°F), accuracy $\pm 2\%$ - Range 0 to 650°C (32 to 1202°F): 0 to 100°C (32 to 212°F), accuracy $\pm 2^\circ\text{C}$ ($\pm 3.6^\circ\text{F}$) 100 to 650°C (212 to 1202°F), accuracy $\pm 2\%$ - Range 300 to 2000°C (572 to 3632°F): - accuracy $\pm 2\%^*$

*) For 42° lens; accuracy is $\pm 3\%$ in the range 1800 to 2000°C.

Ethernet	
Interface	- Wired - Wi-Fi (option)
Connector type	- M12 8-pin X-coded, Female - RP-SMA, Female
Ethernet, purpose	Control, result, image, and power
Ethernet, type	1000 Mbps
Ethernet, standard	IEEE 802.3
Ethernet, communication	See Smart Sensor and Image Streaming configurations
Ethernet, power	Power over Ethernet, PoE IEEE 802.3af class 3
Ethernet, protocols	See Smart Sensor and Image Streaming configurations
Digital Input/output	
Connector type	M12 12-pin A-coded, Male (shared with external power)
Digital input	2x opto-isolated Vin(low)= 0–1.5 V, Vin(high)= 3–25 V
Digital input, purpose	See Smart Sensor and Image Streaming configurations

P/N: 85900-0000

© 2025, FLIR Systems, Inc.

#85900-0000; r. AB/101571; en-US

Digital Input/output	
Digital output	3x opto-isolated, 0–30 V DC, max. 300 mA (derated to 200 mA at 60°C) - Solid state opto relay 1x dedicated as Fault output (NC)
Digital output, purpose	See <i>Smart Sensor and Image Streaming configurations</i>
Digital I/O, isolation voltage	500 VRMS
Power system	
Connector type	M12 12-pin A-coded, Male (shared with Digital I/O)
Power consumption	7.5 W at 24 V DC typical 7.8 W at 48 V DC typical 8.1 W at 48 V PoE typical
External power operation	24/48 V DC 8 W max
External voltage	Allowed range 18–56 V DC
Wi-Fi	
Connector type	RP-SMA, Female
Standard	See <i>Wi-Fi option</i>
Antenna	See <i>Wi-Fi option</i>
Connection type	See <i>Wi-Fi option</i>
Environmental data	
Operating temperature range	–20 to 50°C (–4 to 122°F) Cooling plate is needed in temperatures above 40°C (104°F). Maximum camera case temperature: 65°C (149°F)
Storage temperature range	IEC 68-2-1 and IEC 68-2-2, –40 to 70°C (–40 to 158°F) for 16 hours
Humidity (operating and storage)	IEC 60068-2-30/24 hours, 95% relative humidity, 25–40°C (77–104°F)/2 cycles
EMC	- ETSI EN 301 489-1 (radio) - ETSI EN 301 489-17 (radio) - EN 61000-4-8 (magnetic field) - FCC 47 CFR Part 15 Class B (emission US) - ISO 13766-1 (EMC - Earth-moving and building construction machinery) - EN ISO 14982 (EMC - Agricultural and forestry machinery)
Radio spectrum	- FCC 47 CFR Part 15 Class C (2.4 GHz band US) - FCC 47 CFR Part 15 Class E (5 GHz band US) - RSS-247 (2.4 GHz and 5 GHz band Canada) - ETSI EN 300 328 V2.1.1 (2.4 GHz band EU) - ETSI EN 301 893 V2.1.1 (5 GHz band EU) - GITEKI certification number: R201-140447
Encapsulation	IEC 60529, IP 54, IP66 with accessory
Shock	IEC 60068-2-27, 25 g
Vibration	- IEC 60068-2-6, 0.15 mm at 10–58 Hz and 2 g at 58–500 Hz, sinusoidal - IEC 61373 Cat 1 (Railway)

P/N: 85900-0000

© 2025, FLIR Systems, Inc.

#85900-0000; r. AB/101571; en-US

Environmental data	
Safety	IEC 62368-1 (IT equipment audio-visual products)
Corrosion	- ISO 12944 C4 G or H - EN60068-2-11
Declaration of conformity	See: https://support.flir.com/resources/DoC
Physical data	
Weight (including 24° lens)	0.82 kg (1.8 lb)
Size (L x W x H)	123 x 77 x 77 mm (4.84 x 3.03 x 3.03 in)
Base mount	4x M4 on 4 sides
Tripod mounting	UNC 1/4"-20 on 2 sides
Housing material	Aluminium
Color	Black
Warranty and service	
Warranty	http://www.flir.com/warranty/
Shipping information	
Packaging, type	Cardboard box
Packaging, contents	- Infrared camera (without lens) - Ethernet cable M12 to RJ45F (0.3 m), P/N T911869ACC - Printed documentation including the username and password for log in to the web interface of the camera
Packaging, weight	1.14 kg (2.51 lb)
Packaging, size	207 x 142 x 129 mm (8.15 x 5.59 x 5.08 in)
EAN-13	7332558026540
UPC-12	845188022440
Country of origin	Sweden

Supplies & accessories:

- T300292; Advanced Image Streaming configuration
- T300293; Advanced Smart Sensor configuration
- T300239; IR lens, f=10 mm (42°)
- T300240; IR lens, f=17 mm (24°)
- T300241; IR lens, f=29 mm (14°)
- T300586; IR lens Dual FOV, f=17/29 mm (24°/14°)
- T300238; Macro lens 2.0x with case
- T300095; IR lens, f=70 mm (6°) with case
- T951004ACC; Ethernet cable CAT6, 2 m/6.6 ft.
- T130665ACC; Cooling plate
- T131367; FLIR Bridge
- T131369; FLIR Bridge Pro
- T300075ACC; IP hood for lens
- T300163; Hard case for FLIR A400/A500/A700 series
- T300202; Connector cap kit
- T300216; Axxx Accessory kit
- T300218; Two-ball mounting bracket kit
- T300268ACC; A-series connection board
- T911850; Antenna WLAN 2.4/5 GHz + Wi-Fi
- T911850ACC; Antenna for WLAN 2.4/5 GHz
- T911852ACC; Cable M12 to pigtail, 2 m
- T911853ACC; Cable M12 to pigtail, 10 m









FLIR A700 Thermal Core

P/N: 85900-0000

© 2025, FLIR Systems, Inc.

#85900-0000; r. AB/101571; en-US

- T911854ACC; Ethernet cable M12 to RJ45, 2 m
- T911855ACC; Ethernet cable M12 to RJ45, 10 m
- T911869ACC; Ethernet cable M12 to RJ45F, 0.3 m
- T911183; Gigabit PoE injector 16 W, with multi-plugs
- T911997; Tripod
- T199609; Option, Macro mode 50/71/101 μm for 24°
- T300295; Option, Visual camera including MSX
- T300572; Option, Force password change at first-time use
- T199507; Gigabit PoE injector 15 W
- T300805; IR lens, f=5 mm (80°) with case
- T199870; Extended Calibration Certificate for A7xx

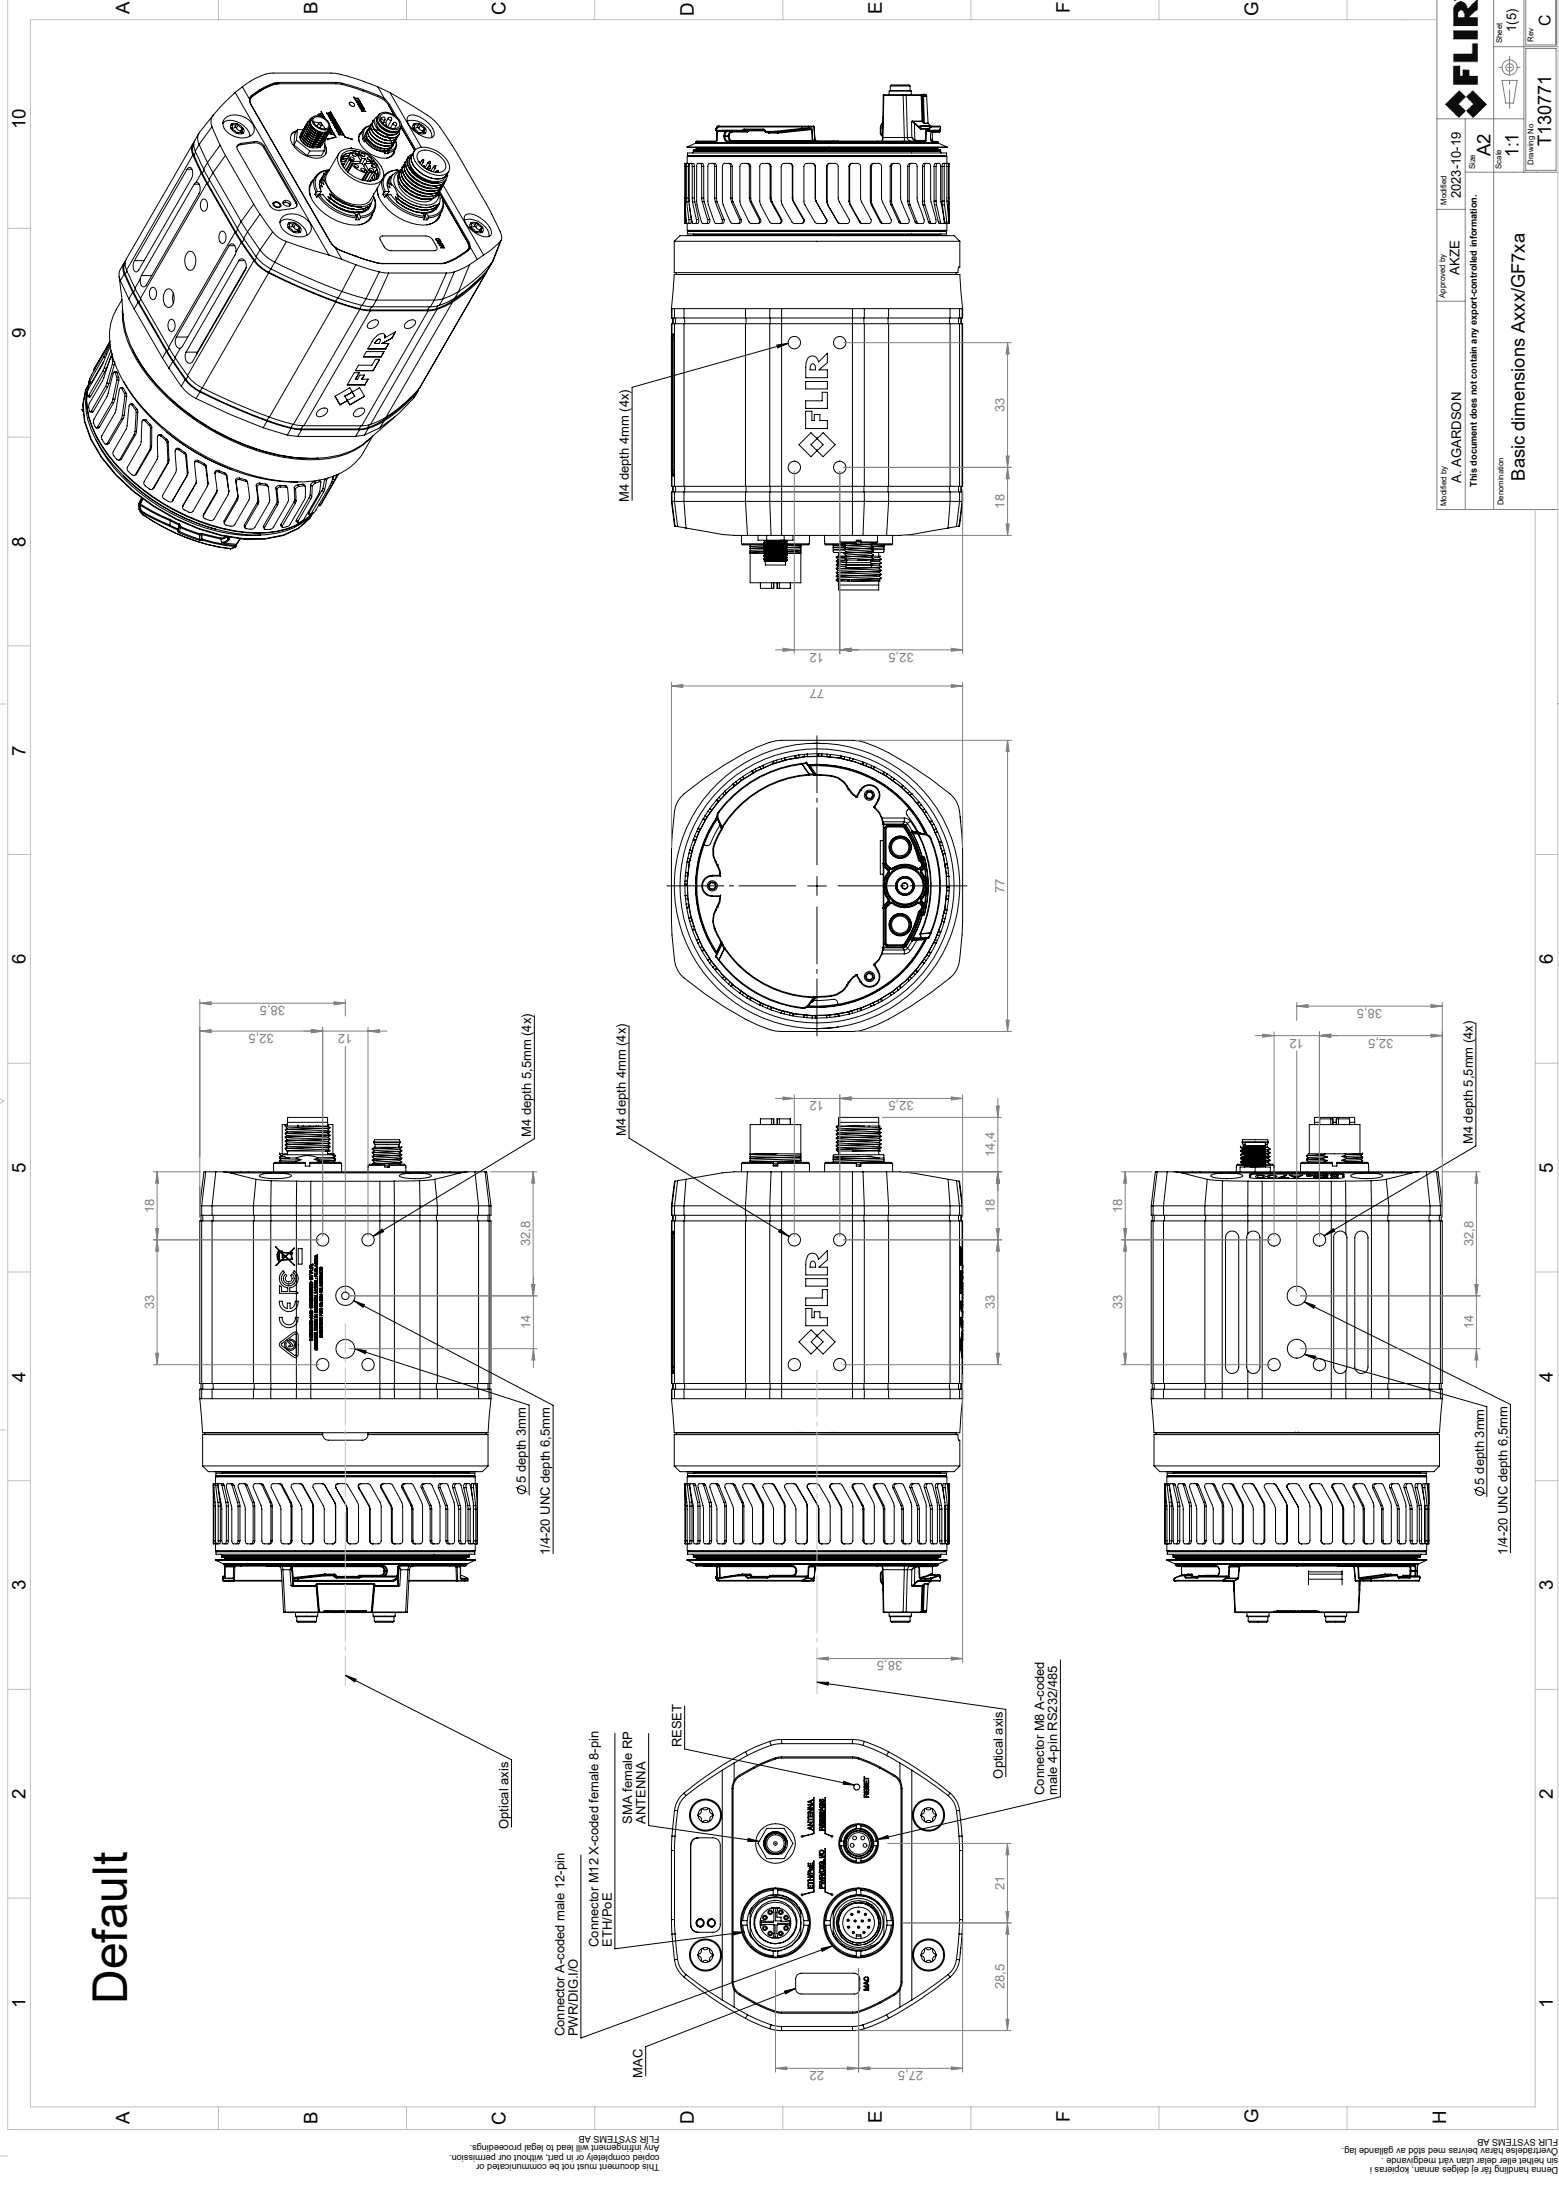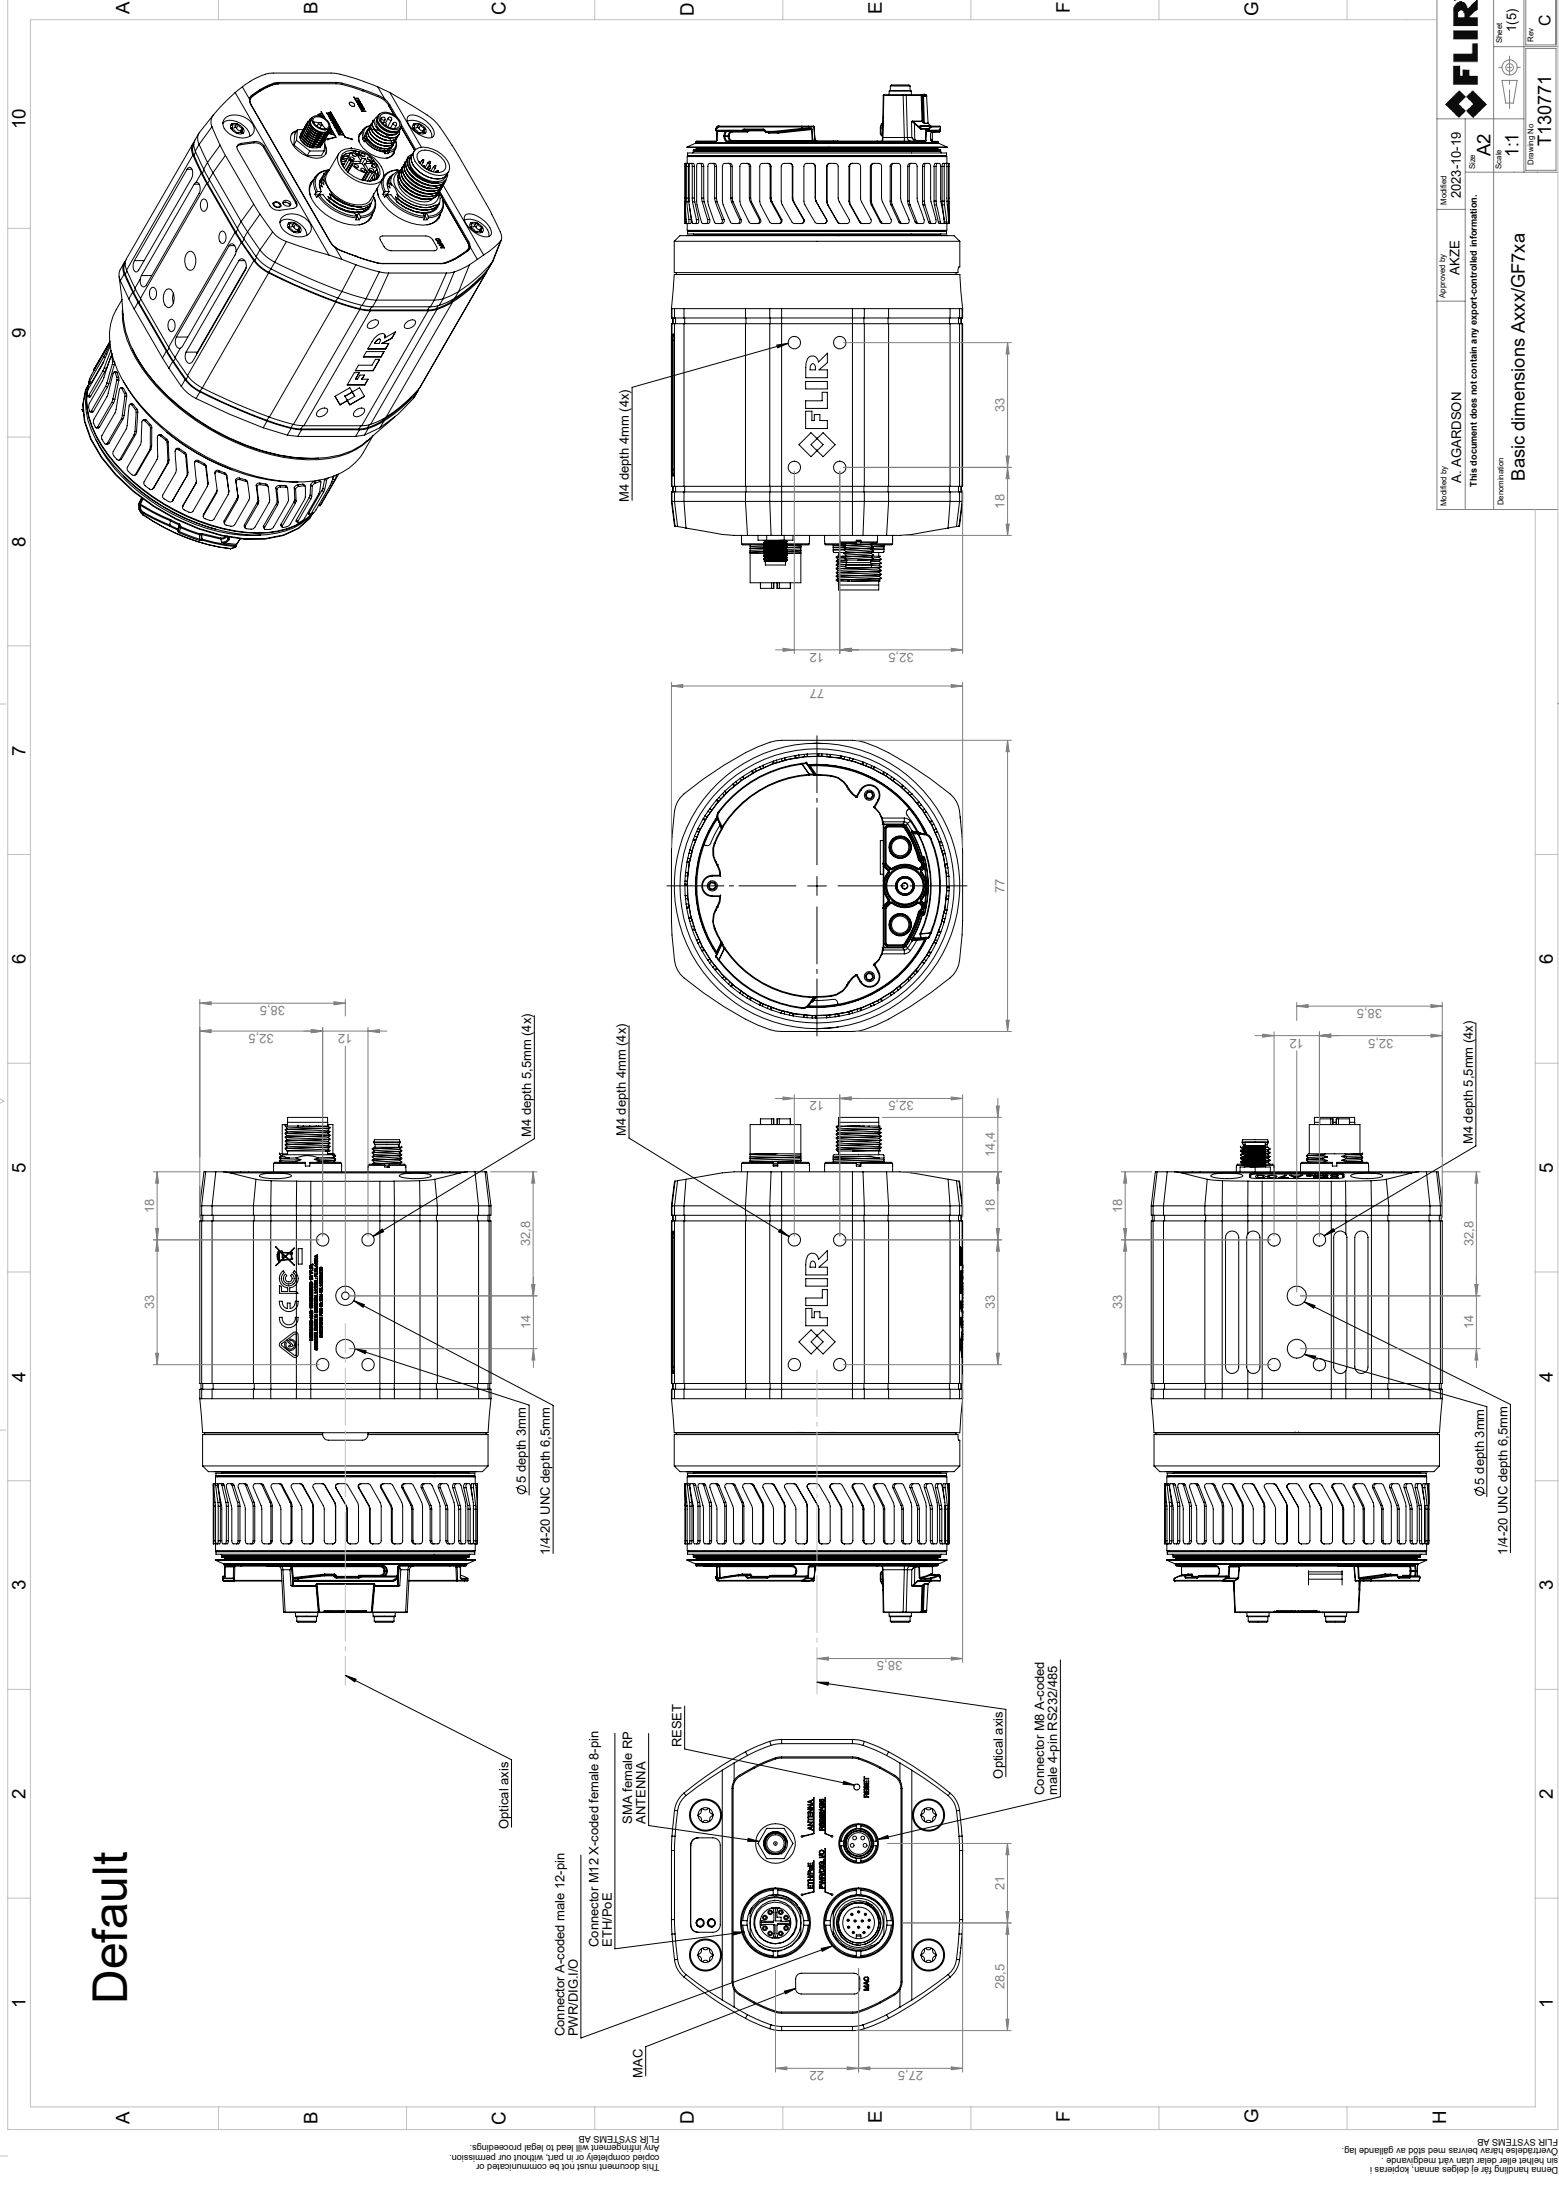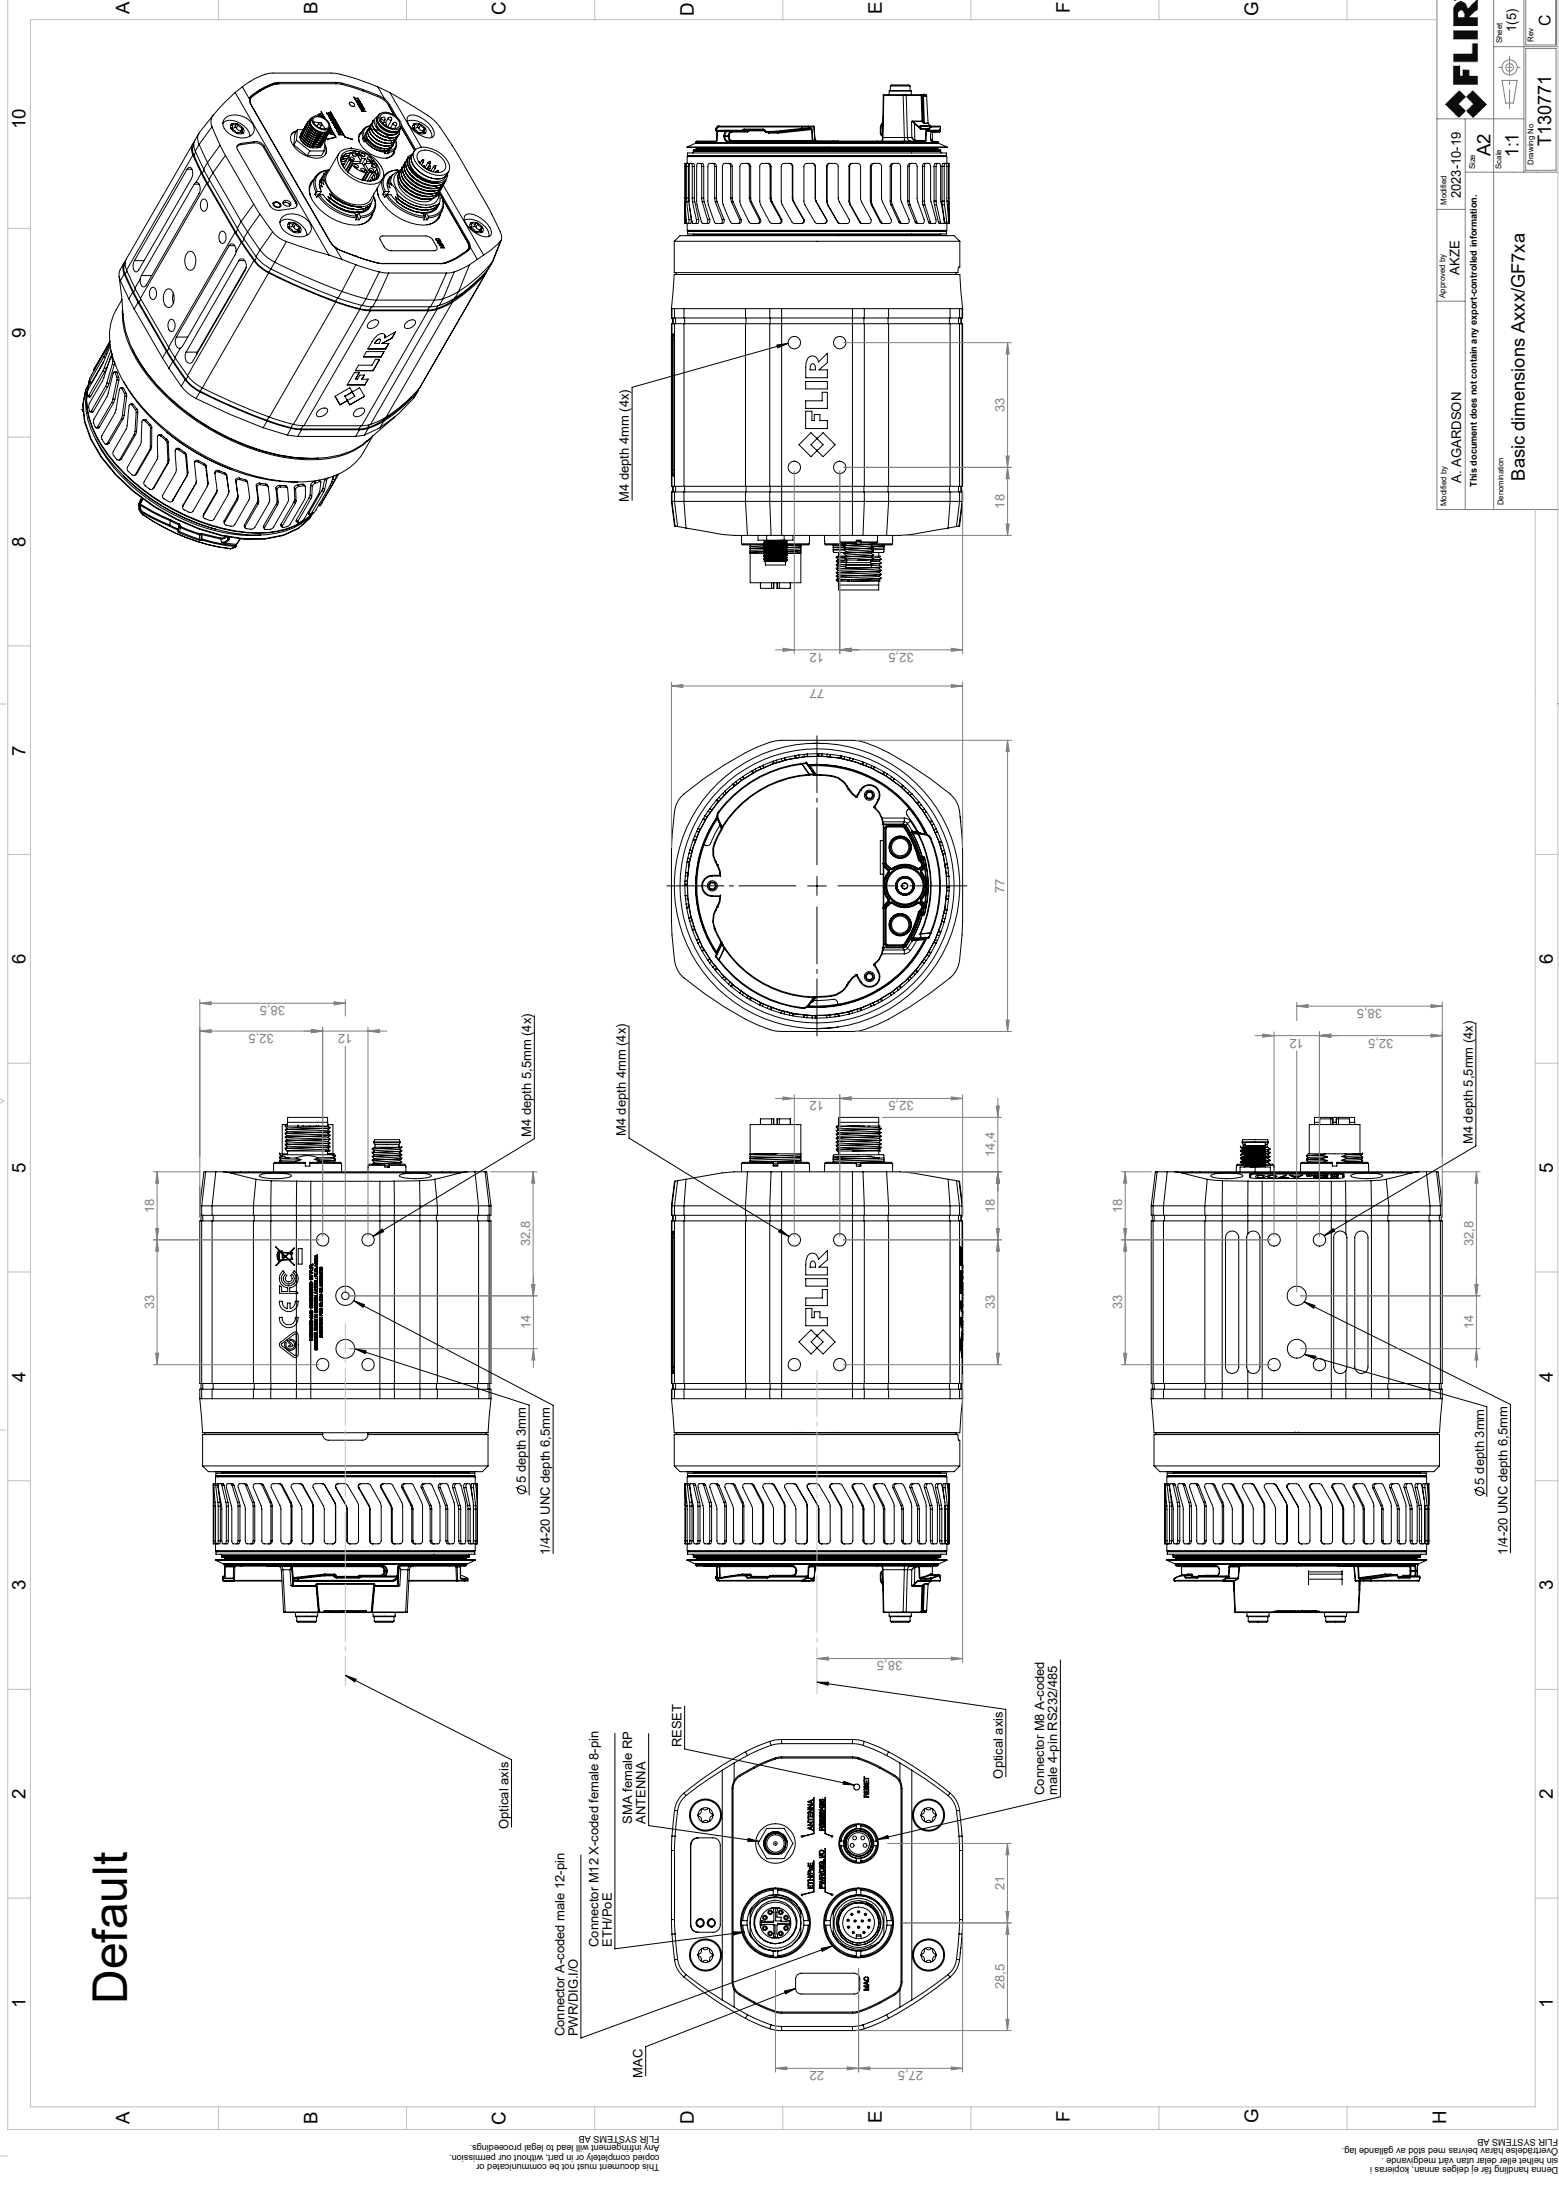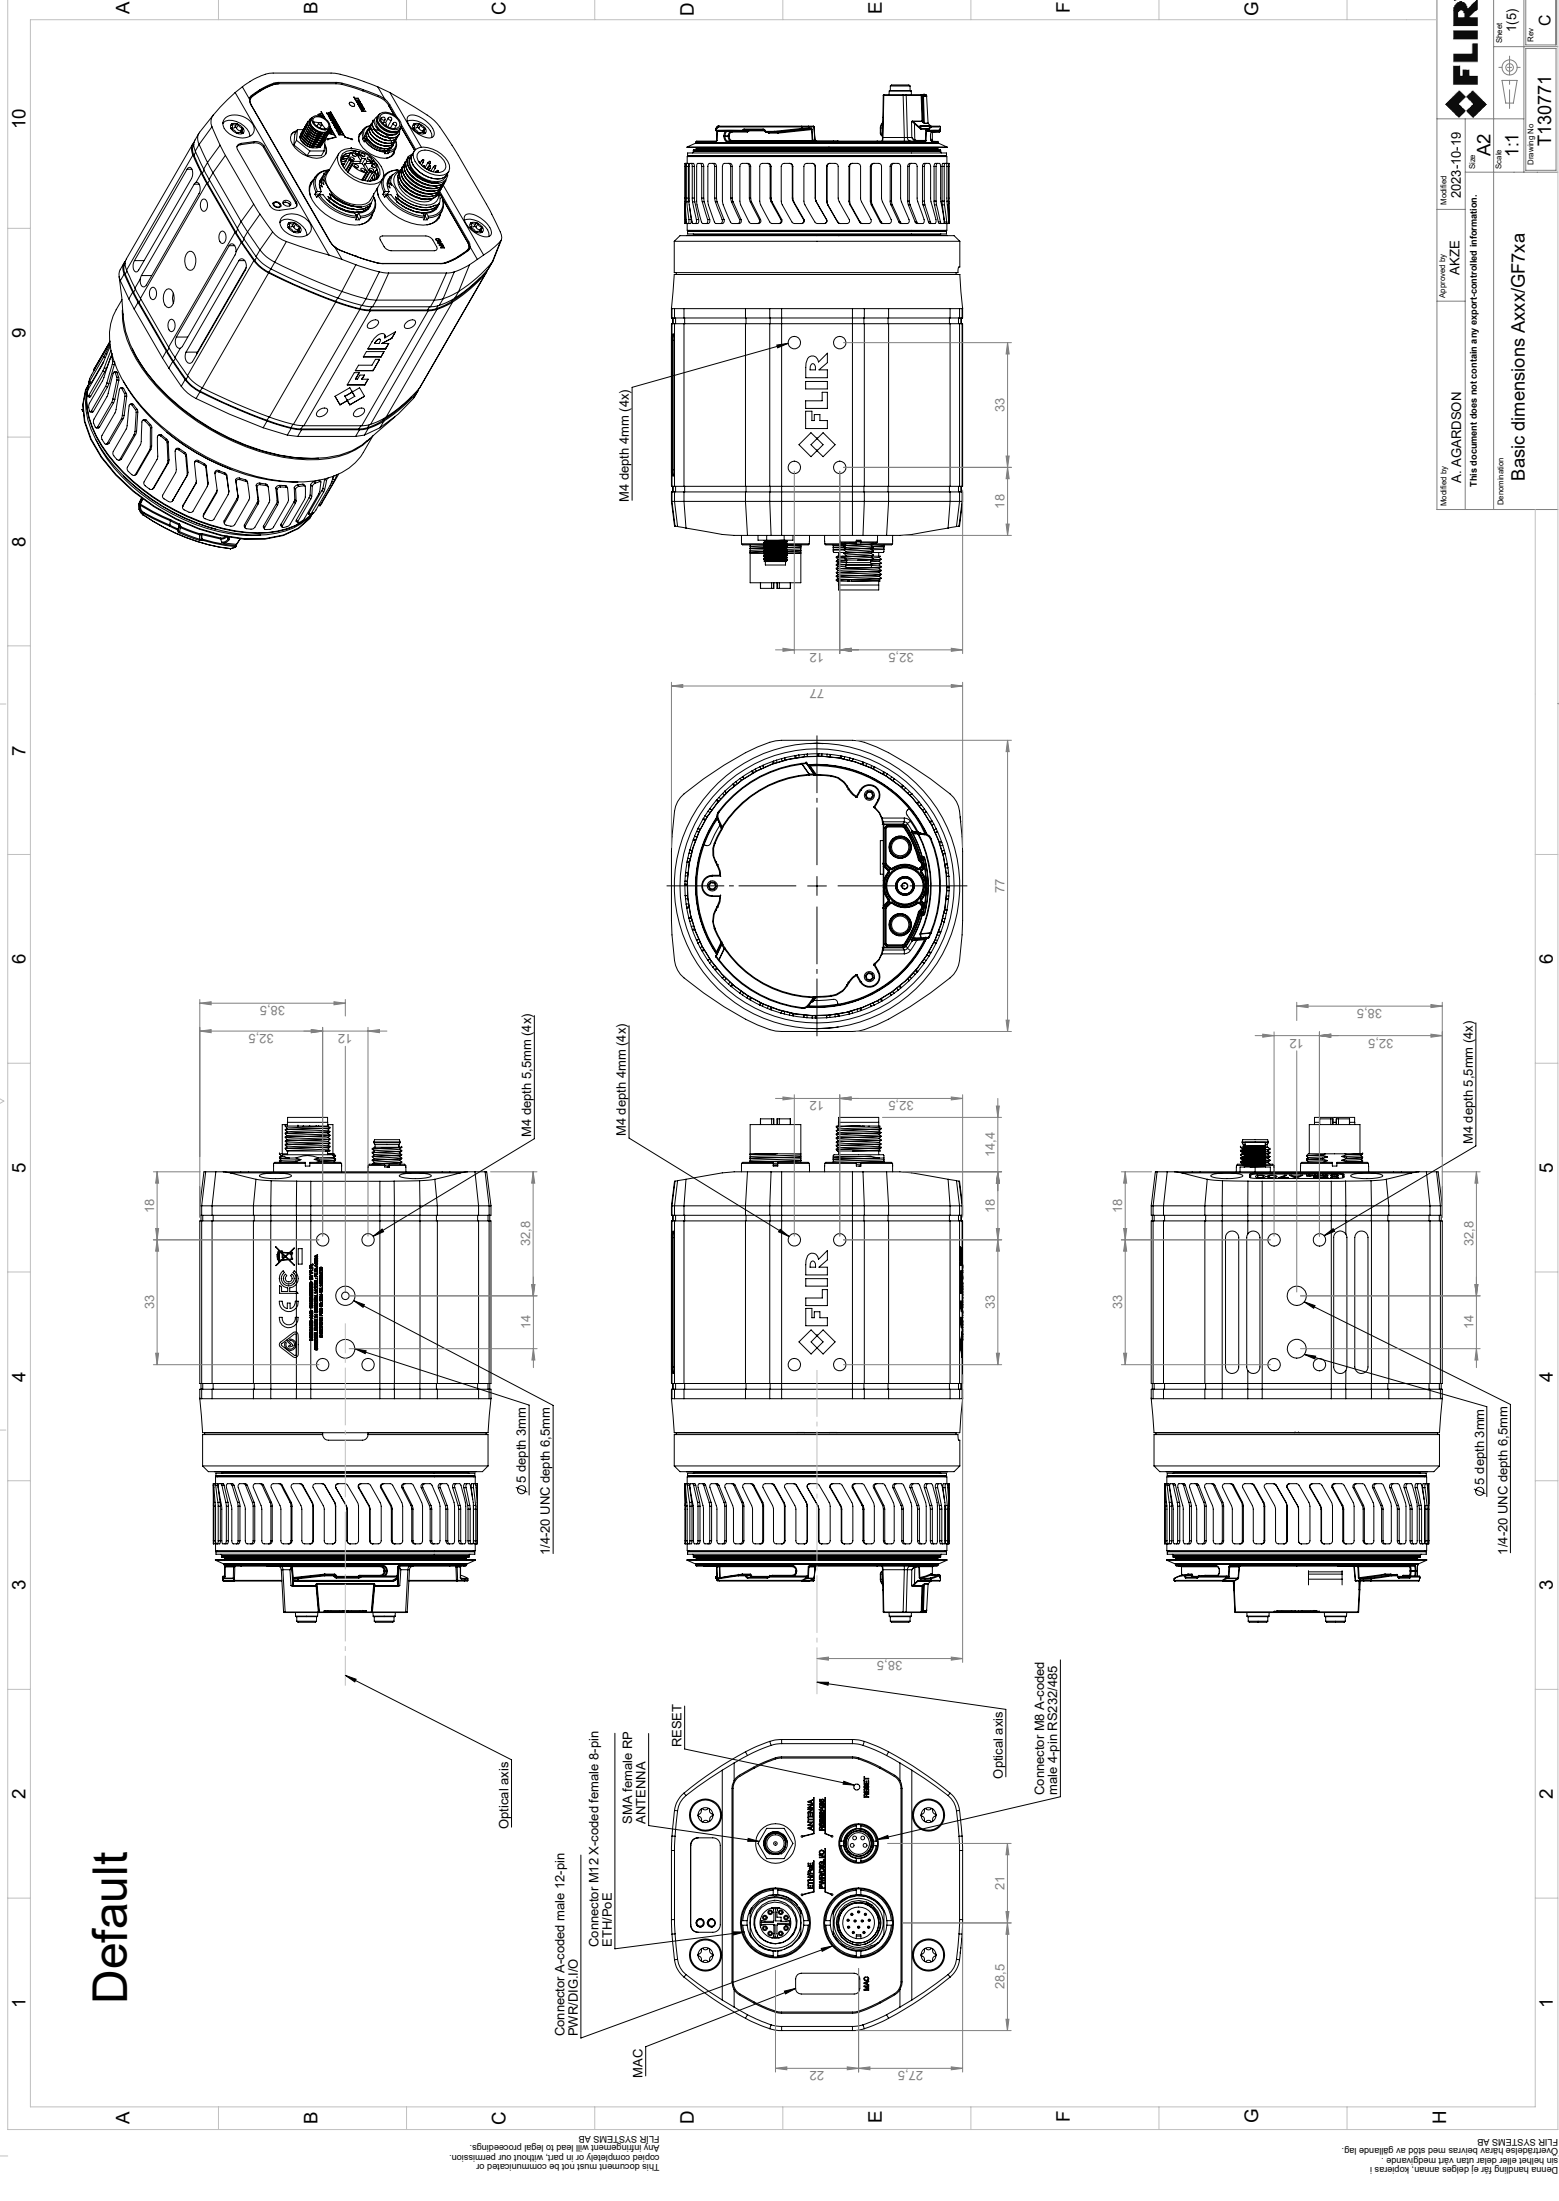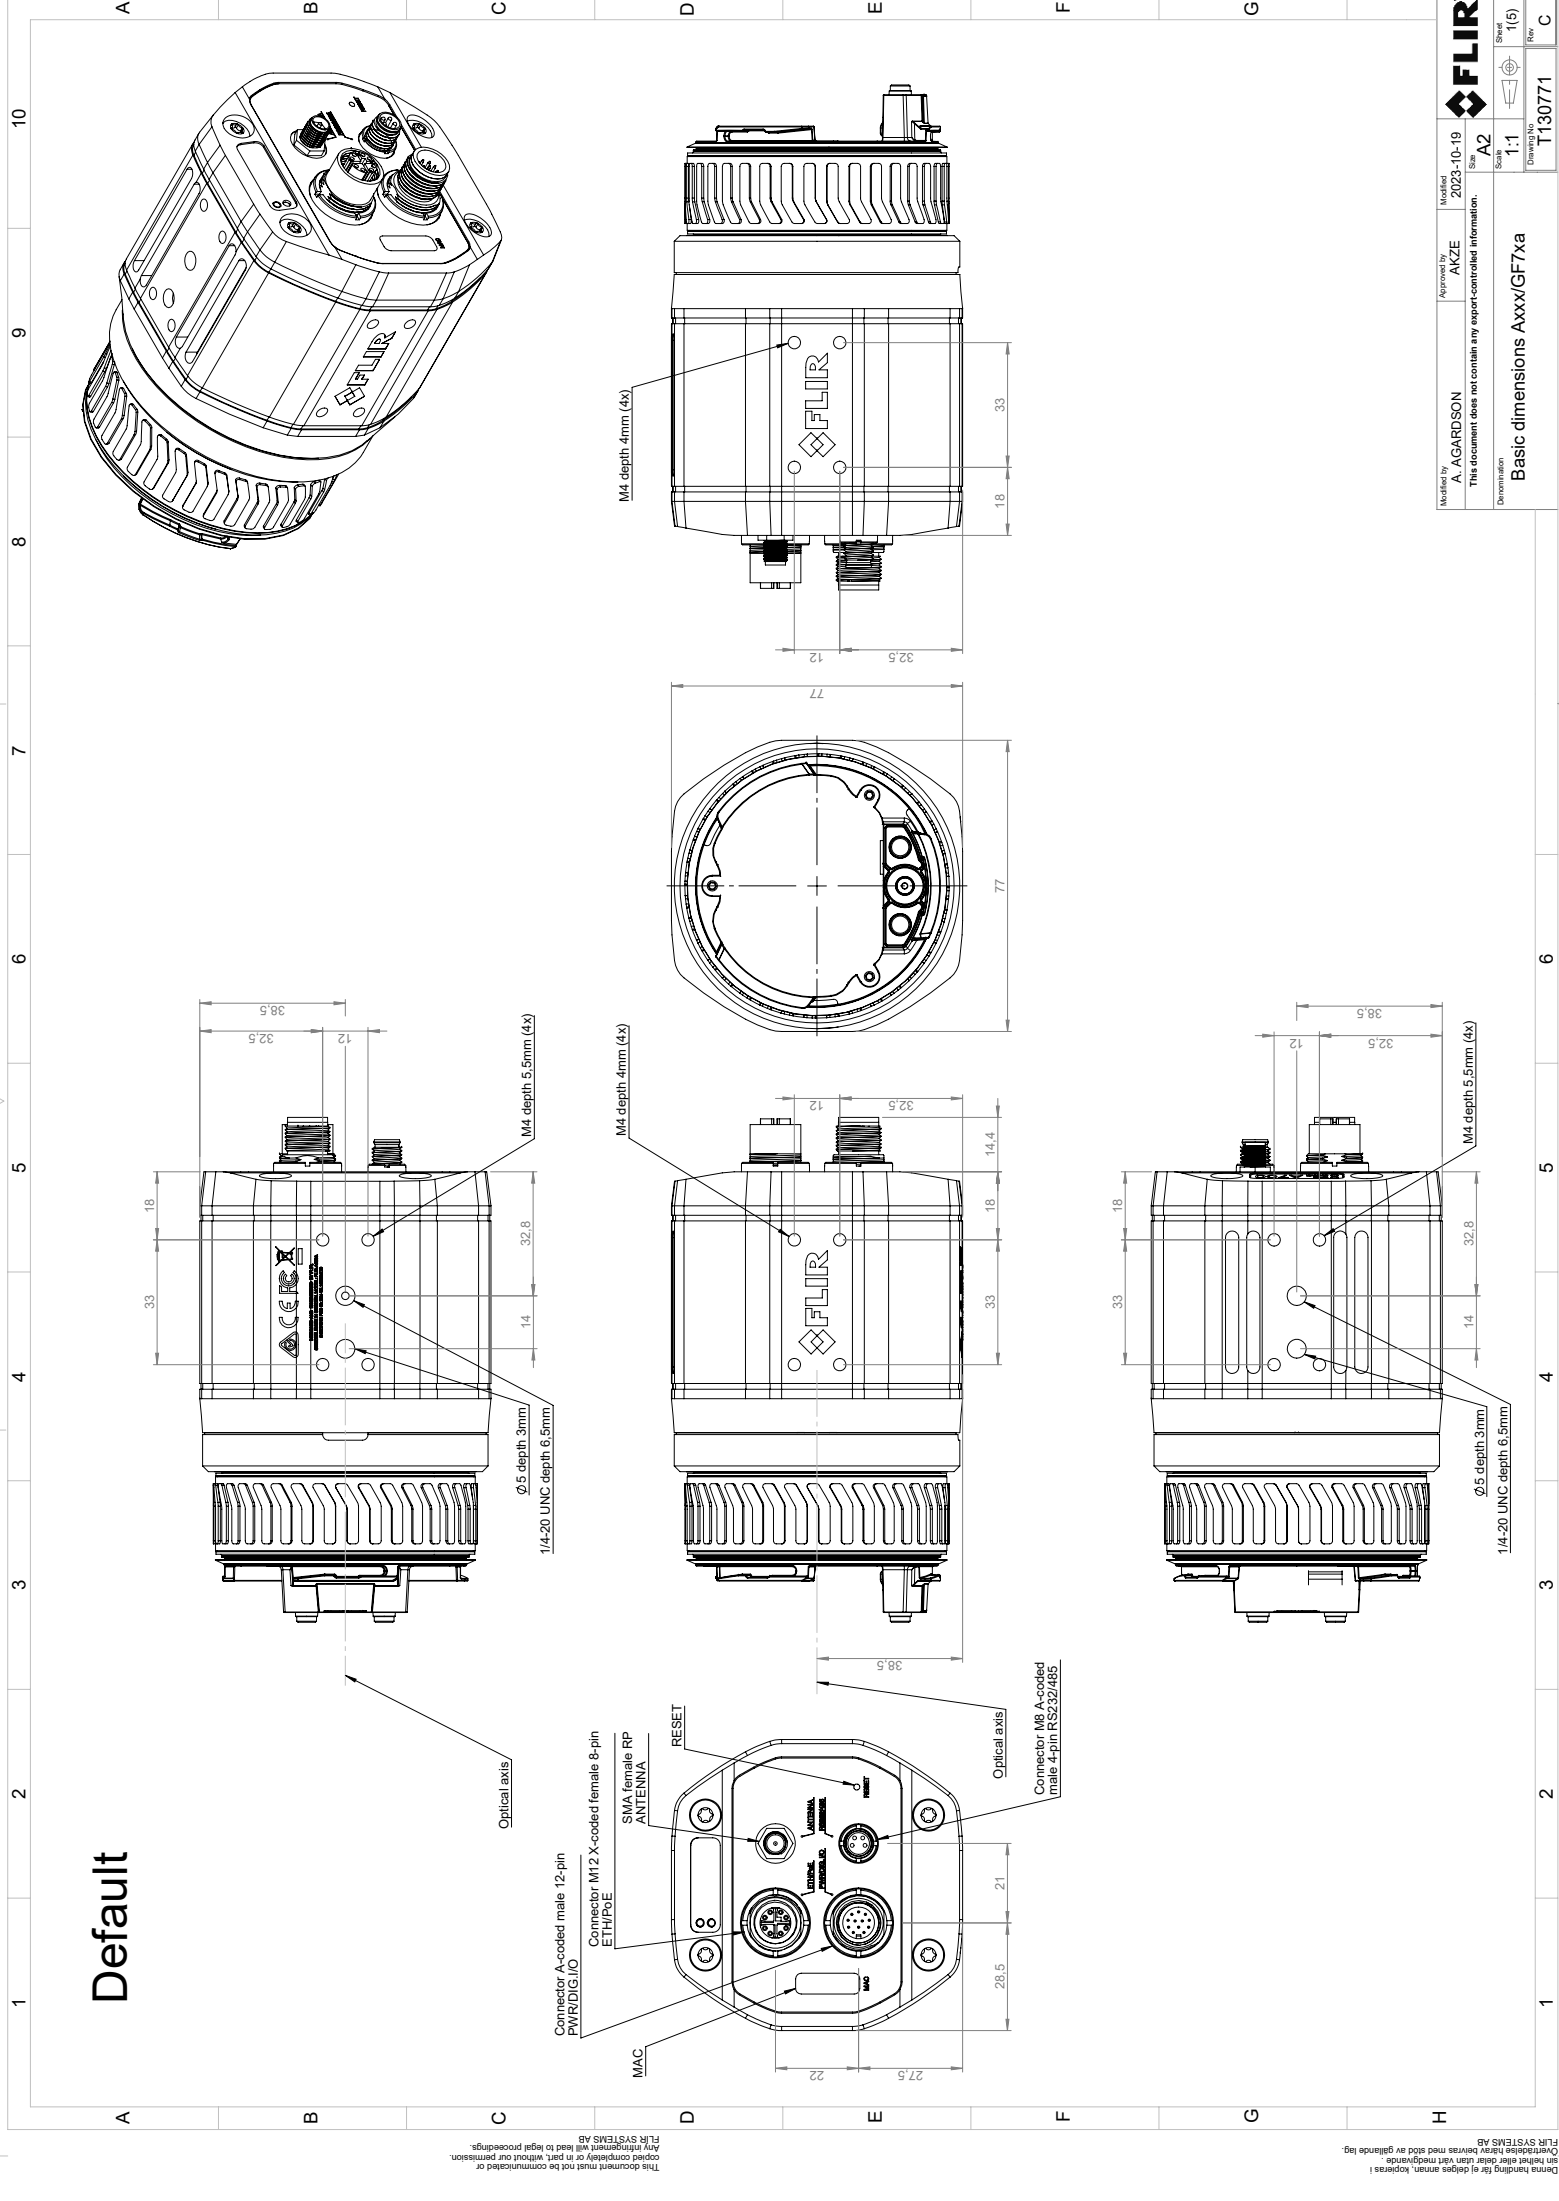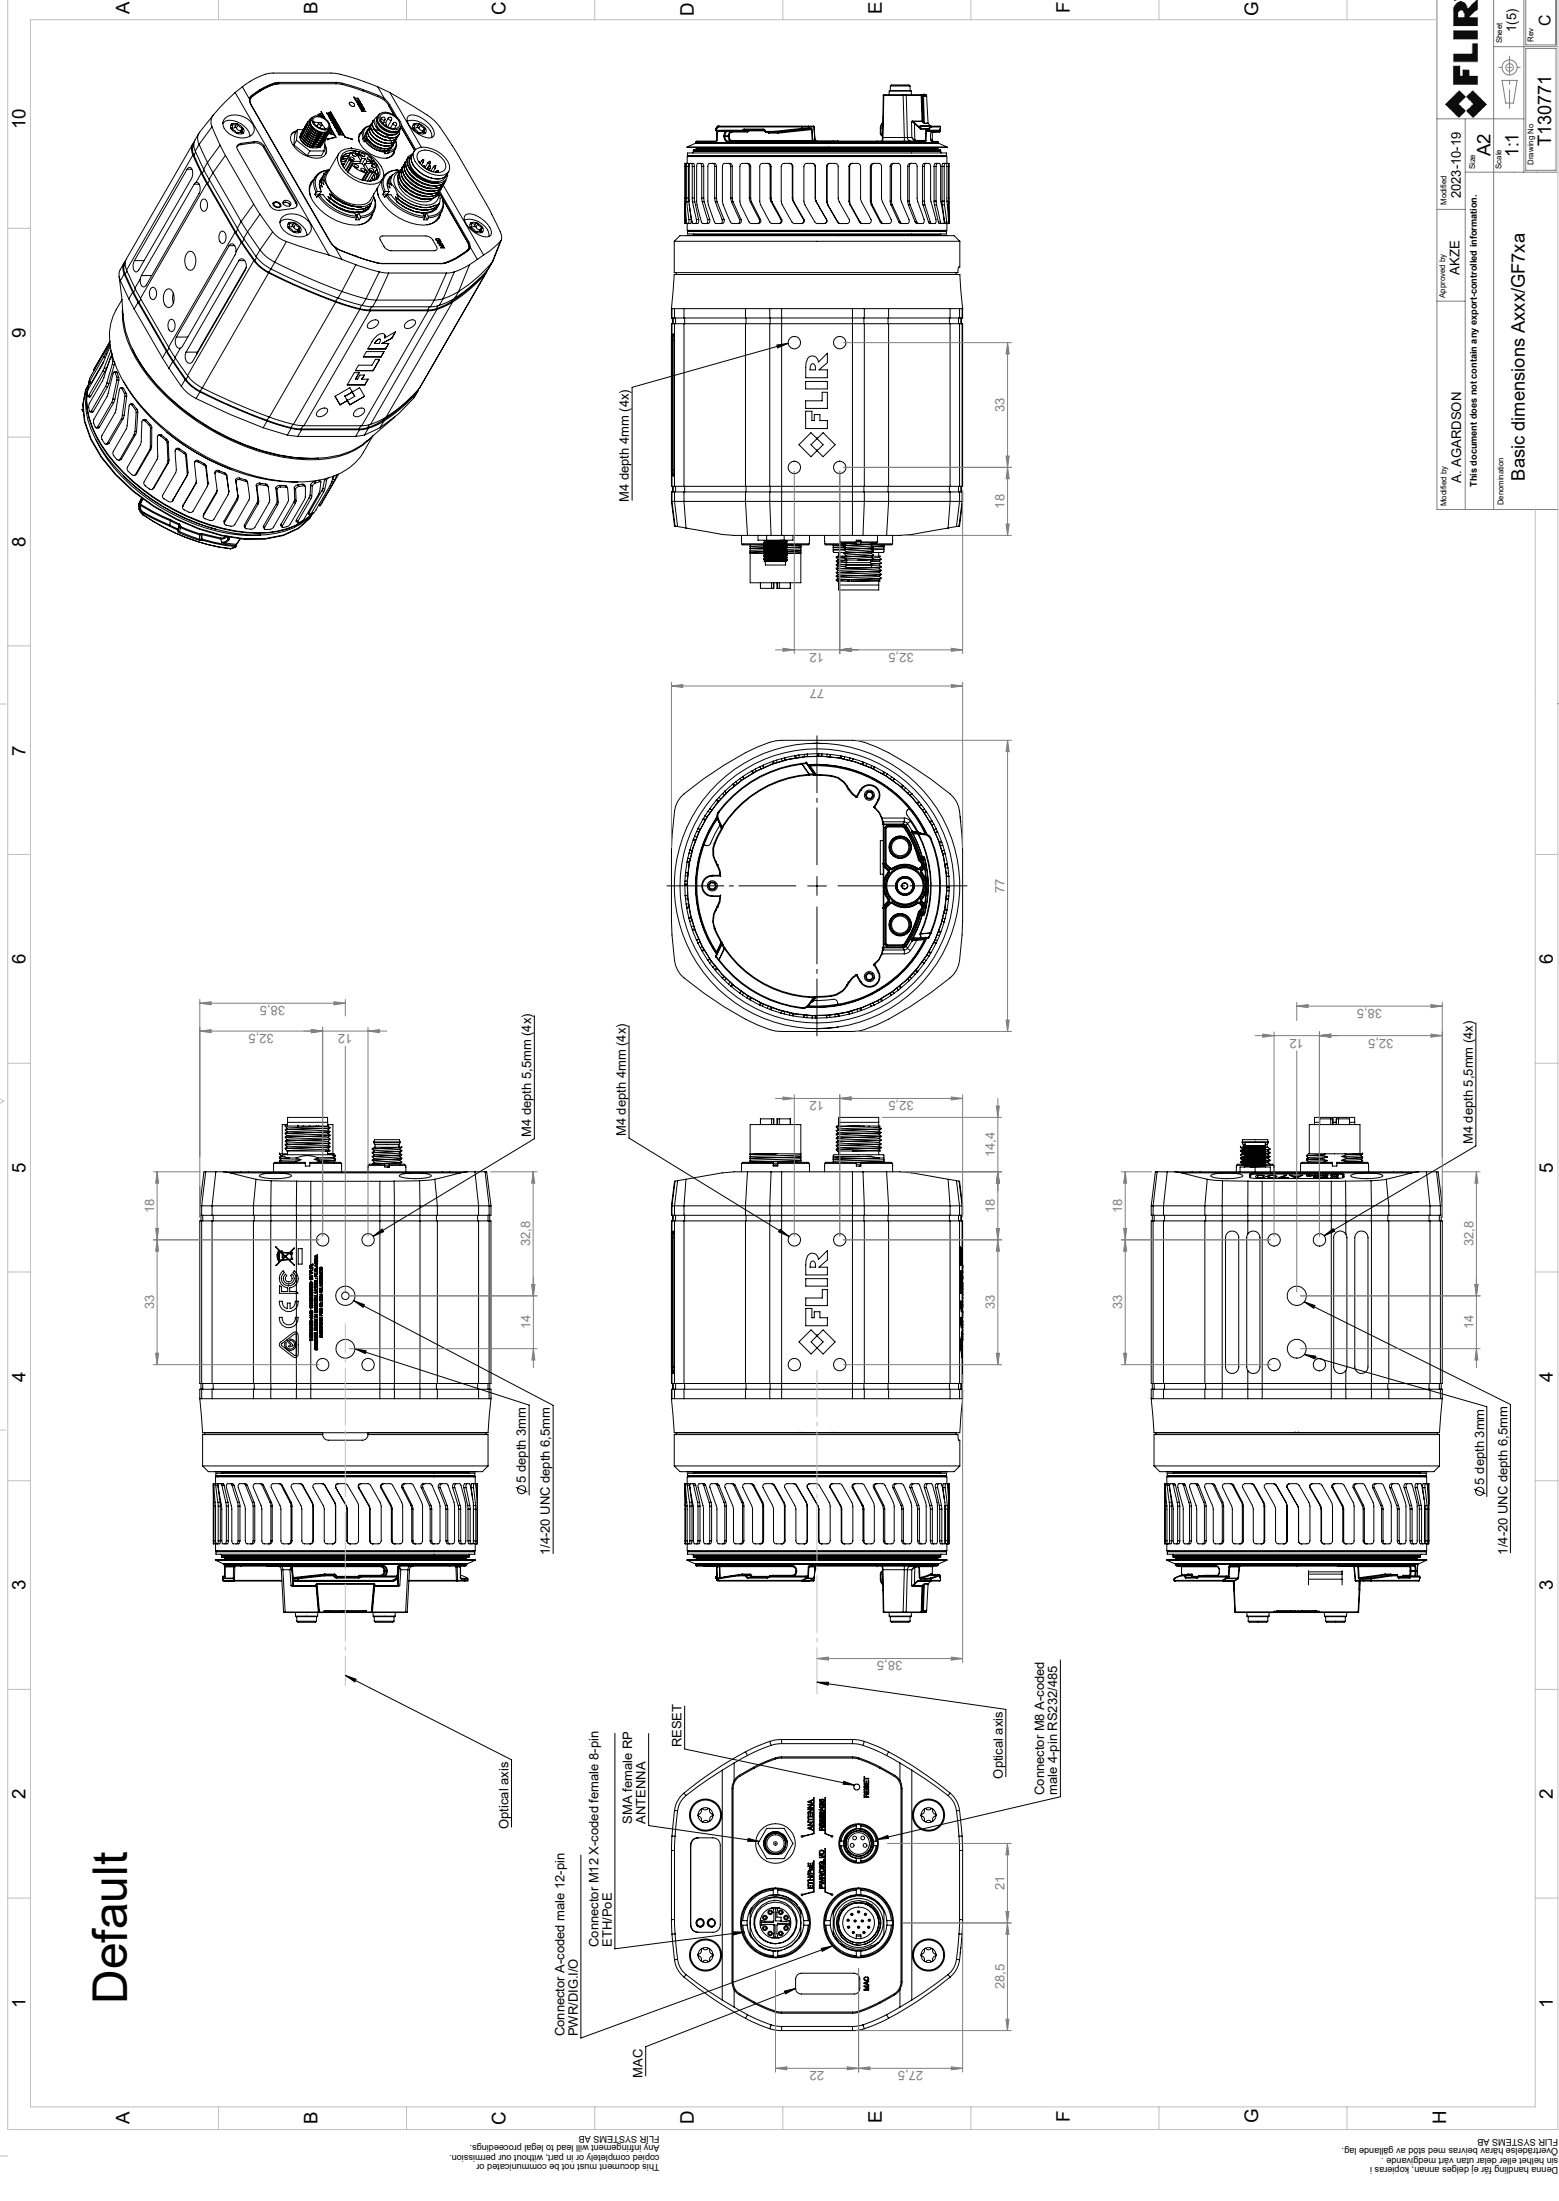[illegible][illegible]

Incl. STD Lenses & Macro

Basic dimensions for cameras with focal length:


f = 10mm
f = 15mm
f = 25mm

Macro WD=18mm






FLIR		Modified by	Approved by	Modified	Size	Sheet	Rev.
A. AGARDSON		AKZE	AKZE	2023-10-19	A2	2(5)	T130771
This document does not contain any expert-controlled information.		Basic dimensions Axxx/GF7xa					
Drawing		Scale		Drawing			
		1:1		T130771			

Macro WD=18mm

Modified by A. AGARDSON	Approved by AKZE	Modified 2023-10-19	Size A2	FLIR
The document does not contain any export-controlled information. Basic dimensions Axxx/GF7xa				Sheet 2(s)  Drawing No T130771 Rev C

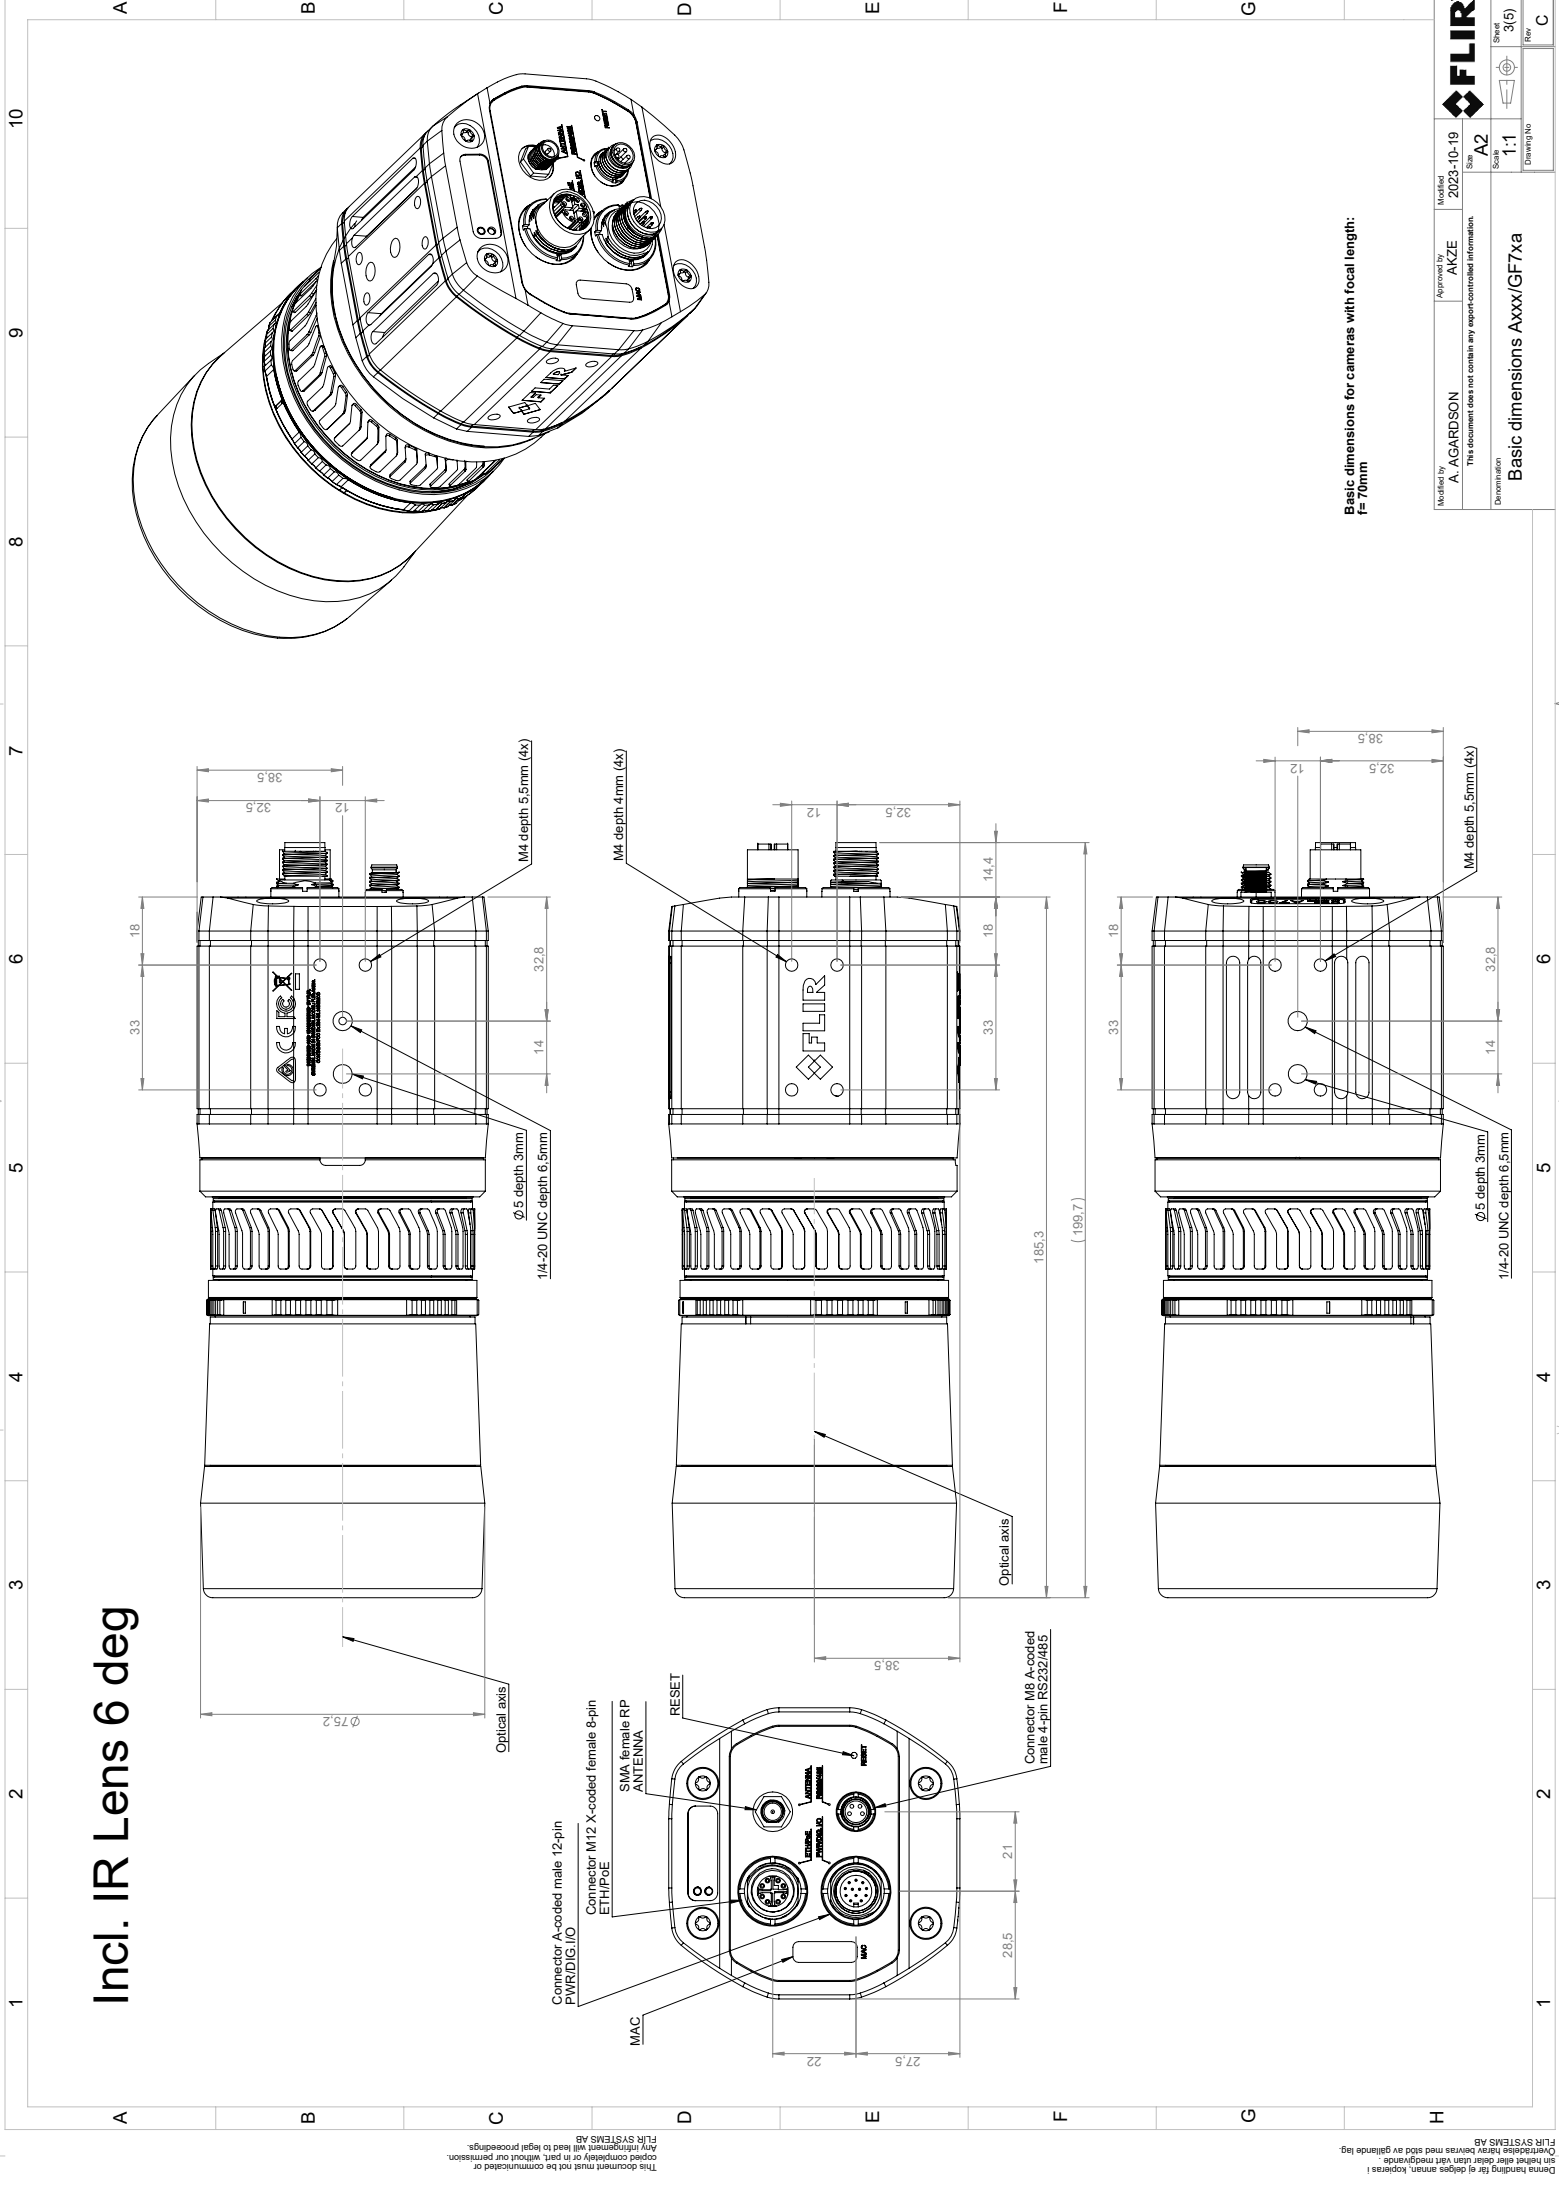[illegible][illegible][illegible]






Incl. IR Lens DFOV

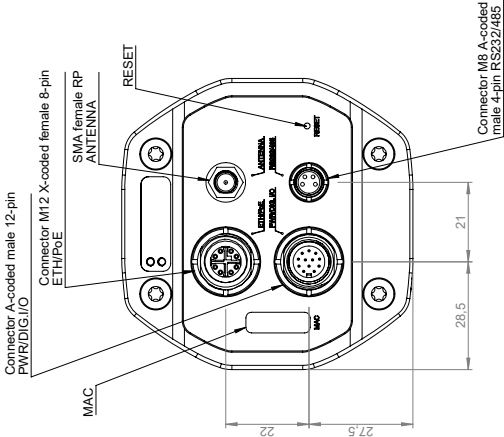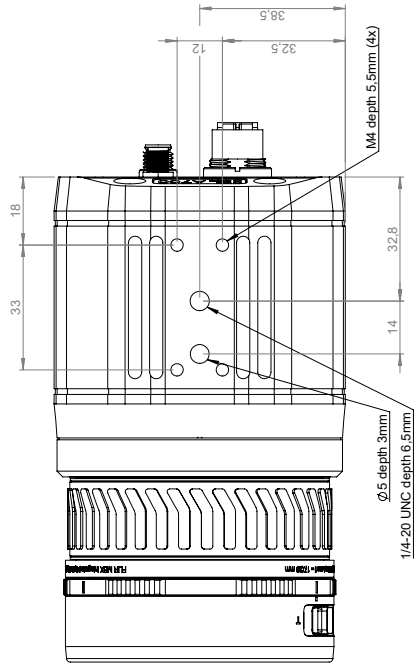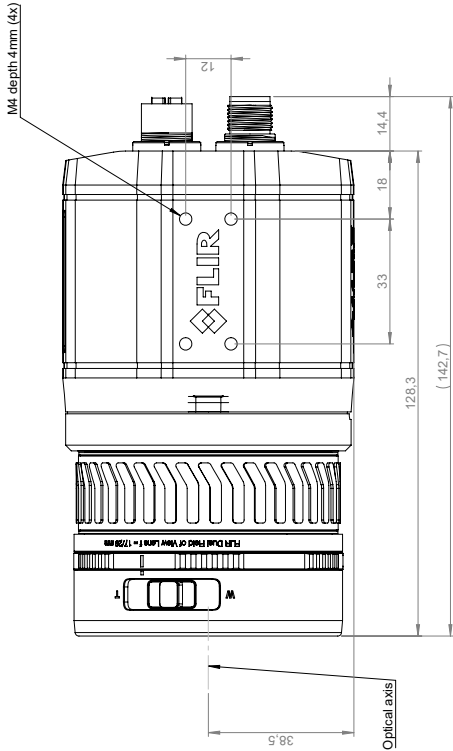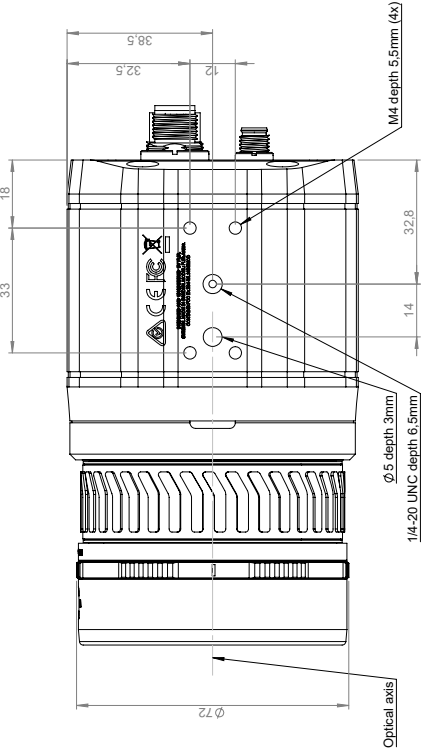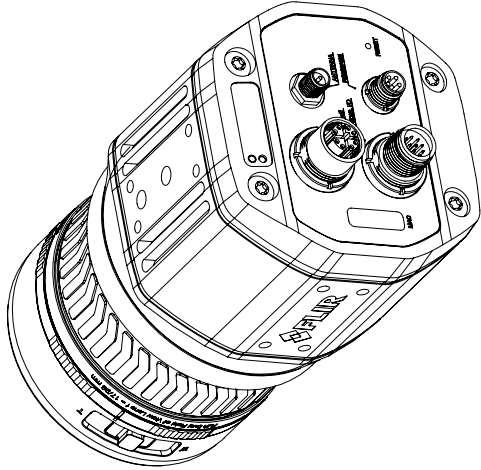

Basic dimensions for cameras with DFOV lens:
f= 1729 mm

Modified by	Approved by	Modified	FLIR
A. AGARDSON	AKZE	2023-10-19	
This document does not contain any export-controlled information.			Size A2
Scale	1:1	Sheet 4(5)	Rev
Denotation	Basic dimensions Axxx AF		
Document No.	T130771		

Incl. IR Lens 80 deg

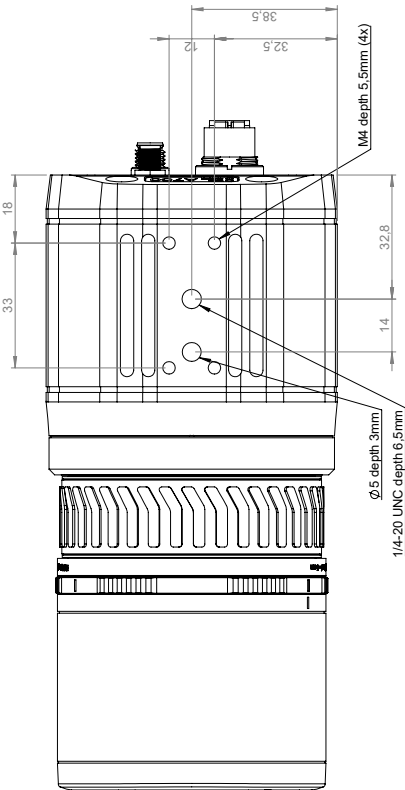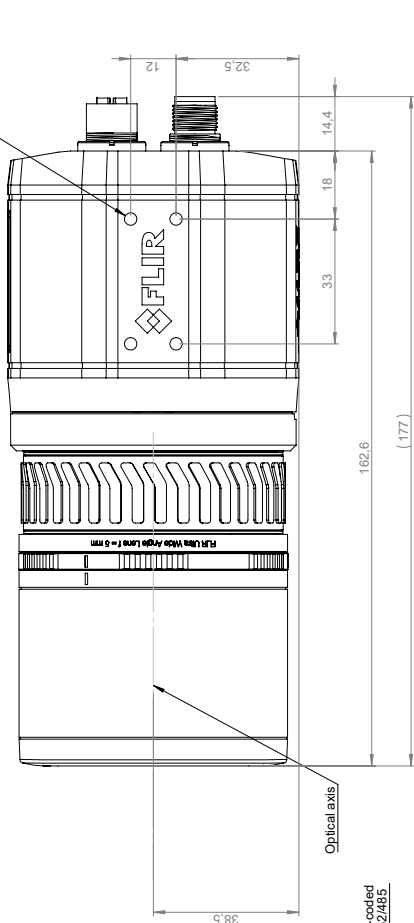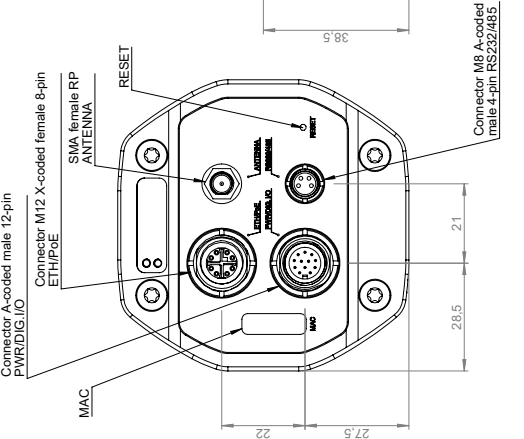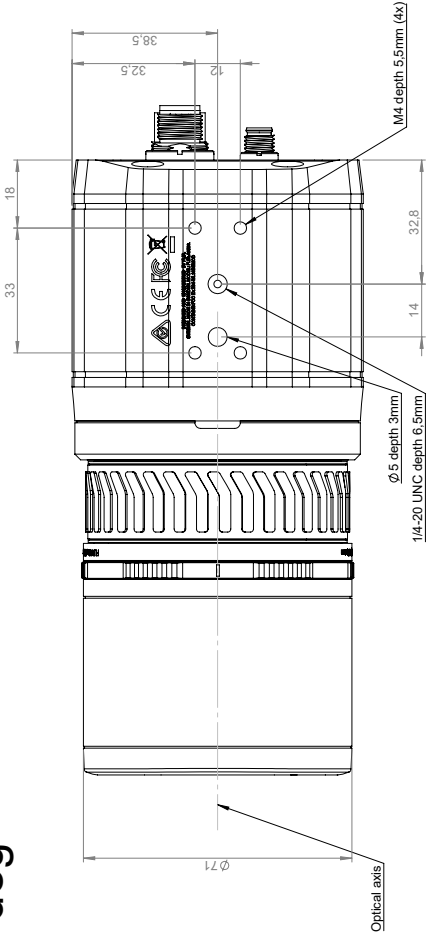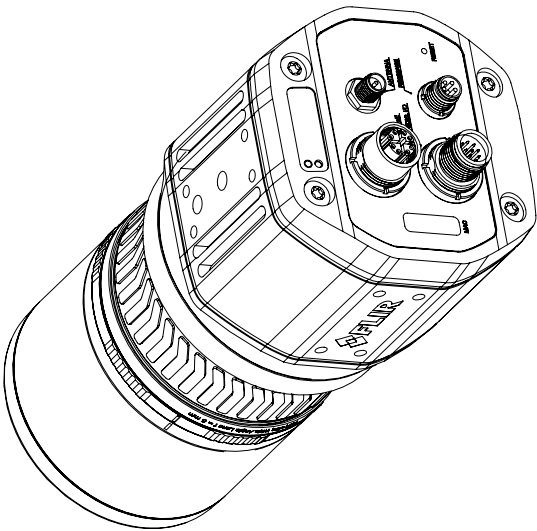

Basic dimensions for cameras with focal length:
f= 5mm

Modified by	Approved by	Modified	Size	Scale	Sheet	Rev
A. AGARDSON	AKZE	2023-10-19	A2	1:1	5(5)	
This document does not contain any export-controlled information.						
Denotation						
Basic dimensions Axxx AF						
Drawing No. T130771						

