


PROFESSIONAL THERMAL IMAGING CAMERA

FLIR T560™



The FLIR T560 thermal camera has the resolution and advanced features needed for professionals to troubleshoot hot spots, find hidden faults, and confirm repairs to power generation, electrical transmission and distribution, and manufacturing equipment. These ergonomic handheld cameras have a 180° rotating lens platform and bright 4" LCD to help inspectors easily and comfortably diagnose electrical or mechanical issues, even in hard-to-reach areas. Advanced on-camera measurement tools such as 1-Touch Level/Span, plus laser-assisted autofocus, ensure accurate temperature measurement recording every time. Add the FLIR Inspection Route camera option to download survey plans from FLIR Thermal Studio Pro* and run them on the T560 camera.

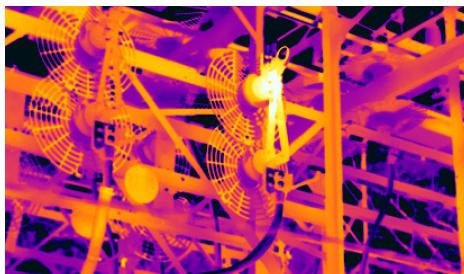

MAKE CRITICAL DECISIONS QUICKLY

Advanced imaging technology and high sensitivity help professionals make the right call – fast

- Get industry-leading image clarity from FLIR Vision Processing™, through the power of patented FLIR MSX®, UltraMax®, and proprietary adaptive filtering
- Determine accessibility of components for repair at the touch of a button by activating on-screen laser distance measurement
- Scan large areas from a safe distance with 640 x 480 resolution, delivering 307,200 radiometric non-contact temperature measurement points



MAXIMIZE EFFICIENCY, SAFETY, & PERFORMANCE

Assess equipment and prevent component failure safely from any vantage point

- Target overhead components with less strain thanks to 180° rotating optical block
- Share lenses (wide angle to telephoto) across a fleet of cameras with AutoCal™ optics
- Ensure precision measurement with laser-assisted autofocus and 1-Touch Level/Span
- Make decisions easily with an LCD display that's 33% brighter and 4x the resolution of comparable cameras



TOOLS TO MAKE THE JOB EASIER

Organize findings in the field with built-in navigation and reporting features

- Quickly access menus, folders, and settings using intuitive controls, including rapid response touchscreen and two programmable buttons
- Streamline surveys by downloading survey plans from FLIR Thermal Studio Pro* to the T560[†]
- Prepare precise documentation with embedded GPS locations, as well as measurement data from METERLiNK®-enabled FLIR clamp meters and multimeters

* FLIR Route Creator Plugin required

† FLIR Inspection Route camera firmware require

SPECIFICATIONS

General		Image storage	
IR resolution	640 x 480 (307,200 pixels)	Storage media	Removable SD card
UltraMax® resolution	1.2 MP	Image file format	Standard JPEG with measurement data included
Detector pitch	12 µm	Time lapse (infrared)	10 secs to 24 hrs
Thermal sensitivity/NETD	<30 mK @ 30°C/86°F (42° lens)	Video recording and streaming	
Spectral range	7.5 - 14.0 µm	Radiometric IR video recording	Real-time radiometric recording (.csq)
Detector type	Uncooled microbolometer	Non-radiometric IR or visual video recording	H.264 to memory card
Imaging and optical		Radiometric IR video streaming	Yes, over UVC
Image frequency	30 Hz	Non-radiometric IR video streaming	H.264 or MPEG-4 over Wi-Fi; MJPEG over UVC or Wi-Fi
Lens identification	Automatic	Video out	DisplayPort over USB Type-C
F-number	f/1.1 (42° lens), f/1.3 (24° lens), f/1.4 (14° lens)	Additional data	
Macro mode (option with 24° lens)	50 µm min. focus distance	Laser pointer	Class 2, position automatically displayed on the infrared image
Focus	Continuous with laser distance meter (LDM), one-shot LDM, one-shot contrast, manual	Battery type	Li ion battery, charged in camera or on separate charger
Minimum focus distance	42° lens: 0.15 m (0.49 ft) 24° lens: 0.15 m (0.49 ft) 14° lens: 1 m (3.28 ft)	Battery operating time	>4 hours at 25°C (77°F), typical use
Digital zoom	1–8× continuous	Operating temperature range	-15°C to 50°C (5°F to 122°F)
Measurement and analysis		Shock/vibration/encapsulation/safety	25 g / IEC 60068-2-27, 2 g / IEC 60068-2-6 / IP 54; EN/UL/CSA/PSE 60950-1
Object temperature range	-20°C to 120°C (-4°F to 248°F) 0°C to 650°C (32°F to 1202°F) 300°C to 1500°C (572°F to 2732°F)	Weight (including battery)	1.3 kg (2.9 lb)
Accuracy, full range	±2°C (±3.6°F) or ±2% of reading	Size (l x w x h, lens vertical)	140 x 201 x 84 mm (5.5 x 7.9 x 3.3 in)
Spotmeter and area	3 in live mode		
Measurement presets	None, center spot, hot spot, cold spot, User Preset 1, User Preset 2		
Laser distance meter	Yes; dedicated button		
On-screen area measurement	Yes		
Programmable buttons	2		
Annotations			
Inspection routing	Camera firmware option; file created in FLIR Thermal Studio Pro using FLIR Route Creator plug-in		
Voice	60 sec with built-in or Bluetooth® microphone and speaker on still images and video		
Text	Text from predefined list or soft keyboard on touch-screen		
Image sketch	Yes, on thermal image only		
GPS	Location data automatically added to every still image and first frame in video		
METERLiNK®	Yes		

Specifications are subject to change without notice. For the most up-to-date specs, go to www.flir.com



PREMIUM
CHANNEL
PARTNER

CORPORATE OFFICE

Hi-Tech Systems & Services Ltd.
White House, 119 Park Street
Kolkata 700 016, India

+91 33 2229 0045 flir@hitech.in hitech.in

BRANCHES

Bhubaneswar	New Delhi
Chennai	Raipur
Hyderabad	Singrauli
Jamshedpur	Vadodara
Mumbai	



The World's Sixth Sense®