

FH-Series R

Multispectral Fixed Camera for Early Fire Detection

The FLIR FH-Series R are ruggedized, multispectral fixed cameras that integrate industry-leading thermal imaging with 4K visible imaging to provide rapid visual verification of hot spots in early fire detection applications. When a hot spot or temperature change is detected, the contactless temperature measurement is sent to the operator through a connected Video Management System (VMS) for instantaneous assessment and deployment of response tactics. Custom scheduling provides security personnel the flexibility to enable and disable alarms depending on business hours and seasonality. Combining the power of thermal hot-spot detection with intelligent vehicle detection, false alarms from hot exhaust pipes can be dramatically reduced.

HOT SPOT DETECTION

**IGNORE FALSE ALARMS FROM
VEHICLE EXHAUST PIPES**


DUAL USE PERIMETER PROTECTION

**OBJECT CLASSIFICATION
WITH CNN ANALYTICS**

24/7 SITUATIONAL AWARENESS

CYBERSECURITY HARDENED

SEAMLESS INTEGRATION WITH VMS

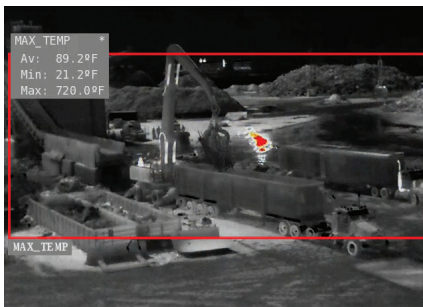

RAPID DETECTION AND VISUAL VERIFICATION

Integrates a high-resolution thermal and visible sensor for hot-spot detection and visual verification from a single device

- Detect hot spots instantly with FH-Series R camera models that feature up to 640 × 512 thermal resolution and <35 mK thermal sensitivity
- See smoke and immediately verify threats with the 4K visible camera
- Combines a two-camera installation in one physical connection for a cost-efficient solution
- 10-year thermal sensor warranty

INTELLIGENT ALARMS

Detect hot spots and intruders with one camera

- Detect threats from intruders as well as hot spots with on-board video analytics
- Eliminate false temperature alarms from hot exhaust pipes with 'vehicle exclusion mode'
- Make detections based on time of day, business hours, and seasonality with the on-board scheduling tool, which allows the operator to select either visible or thermal analytics

EASY INTEGRATION

Deploy the FH-Series R as part of a Teledyne FLIR end-to-end solution or in combination with preferred third-party solutions

- Strengthen end-to-end systems with on-board NEXUS® technology, which enables network connections to FLIR edge devices
- Tightly integrated with FLIR United VMS and major third-party VMS
- ONVIF® Conformant S/G/T profiles
- Receive radiometric alarms through compatible VMS platforms

FH-SERIES R

| | | | | | | |
|--------------------------------------|--|-------------|--------------|-----------|---|---|
| Thermal Sensor & Optics | | | | | System Integration | |
| Array Format (NTSC) | 640 × 512, 320 × 256 | | | | Ethernet | 100/1000 Mbps |
| Detector Type | Long-life, uncooled VOx microbolometer | | | | Network APIs | NEXUS® SDK NEXUS® CGI ONVIF Profile S, G, T |
| Pixel Pitch | 17 µm | | | | Digital I/O | Input: two dry alarm contacts Output: two relay contacts 1A max at 24 VAC/30 VDC Configurable between normally open and normally closed |
| Thermal Frame Rate | NTSC: 30 Hz or PAL: 25 Hz / 8.3 Hz | | | | Network | |
| Optical Characteristics | Model | FOV | Focal Length | F/# | Supported Protocols | IPv4, HTTP, HTTPS, UPnP, DNS, NTP, RTSP, TCP, UDP, ICMP, IGMP, DHCP, ARP, IEEE 802.1X |
| | 369 | 69° × 56° | 9 mm | F1.4 | General | |
| | 324 | 24° × 18° | 13 mm | F1.0 | Input Voltage | 12 VDC (±10%) 24 VDC (±10%) 24 VAC (±10%) 802.3bt |
| | 313 | 13° × 10° | 25 mm | F1.1 | Power Consumption | Nominal: 15 W Heaters enabled, 12 VDC: 48 W Heaters enabled, all other inputs: 70 W |
| | 669 | 69° × 56° | 9 mm | F1.4 | Environmental | |
| | 644 | 44° × 36° | 13 mm | F1.0 | IP Rating (Dust & Water Ingress) | IP66, IP67 |
| | 625 | 25° × 18° | 25 mm | F1.1 | Operating Temperature Range | -40°C to 70°C (-40°F to 158°F) |
| | 617 | 17° × 14° | 35 mm | F1.1 | Storage Temperature Range | -55°C to 85°C (-67°F to 185°F) |
| Spectral Range | 7.5 µm to 13.5 µm | | | | Corrosion | MIL-STD 810G, 1000 hr salt spray |
| Sensitivity (NEΔT) | <35 mK @ 25°C (77°F) F# 1.0 | | | | Humidity | 0-95% relative |
| Visible Light Camera | | | | | | |
| Sensor Type | 4K 2160p (3840 × 2160) | | | | Shock | IEC 60068-2-27 |
| Optical Characteristics | Model | Default FOV | Focal Length | F/# | Vibe | IEC 60068-2-64 |
| | 369 | 98° × 55° | 3.6-10 mm | 1.5 - 2.8 | Vandalism | IK10 (except Windows) |
| | 324 | 34° × 19° | 9-22 mm | 1.4 - 1.7 | Surge Immunity on AC Power Lines | EN 50130- 4 |
| | 313 | 18° × 10° | 13-55 mm | 1.6 - 2.2 | Surge Immunity on Signal Lines | EN 50130- 4 |
| | 669 | 98° × 55° | 3.6-10 mm | 1.5 - 2.8 | Surge/Lightning Protection | TVS 6000 V lightning protection, surge protection, voltage transient protection |
| | 644 | 63° × 35° | 3.6-10 mm | 1.5 - 2.8 | Compliance & Certifications | |
| | 625 | 36° × 20° | 9-22 mm | 1.4 - 1.7 | FCC Part 15 (Subpart B, class A) CE Marked RoHS IP66 WEEE IEC 62368 ONVIF Profile S, G, T | |
| | 617 | 24° × 14° | 13-55 mm | 1.6 - 2.2 | Video Analytics | Region entrance/Intrusion detection Tampering Loitering CNN classifier |
| Temperature Measurement | | | | | | |
| Measurement Accuracy | Target below 100°C (212°F): ± 5°C (±9°F) accuracy Target below 150°C (302°F): ± 5% accuracy Target above 150°C (302°F): ± 15% accuracy <i>*Measured at 25°C (77°F) ambient temperature. Error may be greater at extreme temperatures.</i> | | | | Cybersecurity | IEEE 802.1X TLS/HTTPS User authentication Access control via firewall User credentials with policy enforcement Digest authentication |
| Object Temperature Range | High Gain Mode: 0°C to 160°C (32°F to 320°F) Low Gain Mode: 0°C to 600°C (32°F to 1112°F) | | | | | |
| Video | | | | | | |
| Video Type | IP or analog video | | | | | |
| Sensitivity | Color: 0.25 Lux (@ f1.6 AGC On, 30 fps) B/W: 0.10 Lux (@ f1.6 AGC On, 30 fps) | | | | | |
| Visible Frame Rate | 30 Hz | | | | | |
| Video Compression | Two independent channels of H.264/H.265 or M-JPEG (except 4K) for visible and thermal | | | | | |
| Streaming Resolution | Primary stream: Thermal: VGA (640 × 512), QVGA (320 × 256) Visible: 4K (3840 × 2160), 1080p (1920 × 1080), 720p (1280 × 720) & VGA (640 × 480) Secondary stream: Thermal: VGA (640 × 512), QVGA (320 × 256) Visible: 1080p (1920 × 1080), 720p (1280 × 720) & VGA (640 × 480) | | | | | |
| Thermal Image Settings | Auto AGC, Dynamic Detail Enhancement (DDE), Brightness, Contrast | | | | | |
| Thermal AGC Region of Interest (ROI) | Default, Presets and User definable to insure optimal image quality on subjects of interest | | | | | |
| Image Uniformity Optimization | Automatic Flat Field Correction (FFC) - Thermal and Temporal Triggers | | | | | |



PREMIUM CHANNEL PARTNER

CORPORATE OFFICE

Hi-Tech Systems & Services Ltd.

White House, 119 Park Street

Kolkata 700 016, India

+91 33 2229 0045 | flir@hitech.in | hitech.in

BRANCHES

Bhubaneswar New Delhi

Chennai Raipur

Hyderabad Singrauli

Jamshedpur Vadodara

Mumbai